

HSL 200A Series LED

Specification Grade Wraparound

Shallow Silhouette
Wide Wraparound



FIXTURE SPECIFICATIONS:

The HSL 200 Series LED Wraparound combines the desirable characteristics of the traditional wraparound with an extremely shallow silhouette providing a great new aesthetic for this specification grade luminaire, while keeping this in a price-point to meet the most conservative budget. Now available in several wattage and lumen options, the 200 Series is extremely energy efficient. This fixture is engineered to provide comfortable brightness without harsh glare. Wrap lens also allows for some uplight that washes the ceiling. The 200 Series is available in two, four and eight foot lengths. This series is ideal for all industrial and commercial applications where a surface mounted bright white fixture is required. Ideal for: Schools, stores and offices.

DIFFUSERS

A crystal clear diffuser extruded from 100% virgin acrylic that will maintain its color under normal conditions, indefinitely. Linear prisms on the interior side walls direct the light ceilingwards, which can then refract back down. The bottom is composed of an evenly spaced pattern of conical prisms yielding perfect brightness, with glare free diffused light. Diffuser is lift and shift and is capable of hanging down from either side of the housing.

SIZE W X L X H in inches (mm)


- 11.25W x 24.0L x 3.4Dp (2ft.)
- 15.8W x 24.0L x 3.4Dp (2ft.)
- 11.25W x 48.0L x 3.4Dp (4ft.)
- 15.8W x 48.0L x 3.4Dp (4ft.)
- 11.25W x 96.0L x 3.4Dp (8ft.)

CONSTRUCTION

Body and ends are die blanked, pierced and formed of 20 gauge cold rolled prime steel for rigidity and uniformity. Forming of the housing has been engineered to provide added strength along its entire length.

ORDERING INFORMATION

STANDARD - 200A 2 FT

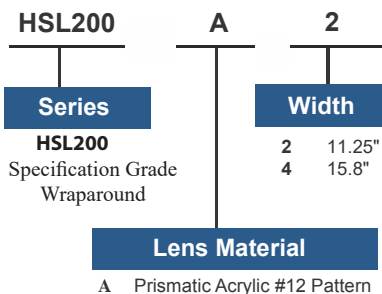

HIGH OUTPUT

Example: HSL200A224LS28W2700LDMV40K

Specification Grade Wraparound

HSL 200A LED Series

ORDERING INFORMATION

Example: HSL200A448LS57W5400LDMV50K

STANDARD - 200A 4 FT

HSL 200	A	4	48L	S57W5400L	DMV	50K
Series HSL 200 Specification Grade Wraparound	Lens Material A Prismatic Acrylic #12 Pattern	Width 2 11.25" 4 15.8"	Size 48L 48"	Wattage and Lumen S32W3450L** 32 System Watts, 3450 Delivered Lumens S48W4800L** 48 System Watts, 4800 Delivered Lumens S57W5400L** 57 System Watts, 5400 Delivered Lumens S65W7000L* 65 System Watts, 7000 Delivered Lumens S97W9600L* 97 System Watts, 9600 Delivered Lumens	Driver MV Multi Volt 120-277V DMV 0-10V	Color Temperature 30K 3000K 35K 3500K 40K 4000K 50K 5000K
**32W,48W,57W - 2 rows LED module, only available in 11.25" width				*65W, 97W - 4 rows LED module, only available in 15.8" width		

ORDERING INFORMATION

Example: HSL200A296LS48W4800LDMV50K


STANDARD - 200A 8 FT

HSL 200	A	2	96L	S48W4800L	DMV	50K
Series HSL 200 Specification Grade Wraparound	Lens Material A Prismatic Acrylic #12 Pattern	Width 2 11.25"	Size 96L 96"	Wattage and Lumen S48W4800L 48 System Watts, 4800 Delivered Lumens S65W7000L 65 System Watts, 7000 Delivered Lumens S97W9600L 97 System Watts, 9600 Delivered Lumens	Driver MV Multi Volt 120-277V DMV 0-10V	Color Temperature 30K 3000K 35K 3500K 40K 4000K 50K 5000K

HIGH OUTPUT H144W14000L 144 System Watts,
14000 Delivered Lumens

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

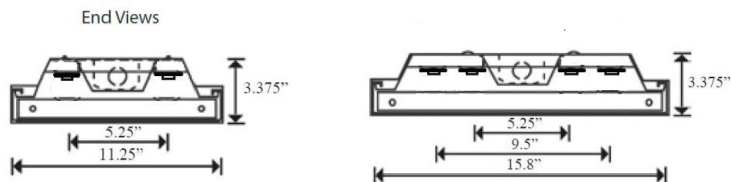

LOCATION OF KNOCKOUTS ON TOP OF HOUSING

All knockouts of 7/8" unless noted otherwise

