

HSL - 23 Series

Direct/Indirect/ Recessed Mount/
Wall Mount/ Surface Mount Linear Fixture

FEATURES & SPECIFICATIONS

INTENDED USE


A linear 2 x 3 fixture for distinctive architectural lighting plans. Ideal for corridors, lobbies, and office areas, 2 x 3 Series fixtures can be installed individually or in a continuous run. Specially designed for direct/indirect lighting with snap in lensto hide the lamps or LED arrays. Ideal where downlight and uplight are required.

HOUSING

Die-formed and welded 22-gauge cold rolled steel Knockouts on ends allow continuous wireway mounting. Housing is specially designed for direct/indirect lighting with separating lamps compartments for each.

DIFFUSERS

Fixture accepts various lenses or louvers. 4' and 8' units have a steel mullion to join two individual diffusers. Snap in reflector is ideal for uplight lens.

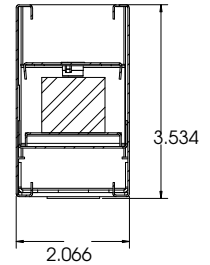

MOUNTING

Fixtures can be surface mounted to the ceiling or pendant hung by stem or cable.

TYPICAL OPTIONS AND ACCESSORIES Cord sets, whips, occupancy sensors Hanging kits, Wire guards. Contact factory for additional options.

ORDERING INFORMATION

4 FT-UP and DOWN LIGHT

Example: 23WSF48LUR12WD24WDMV40KWH

23W Wall Mounted	SF	48L 48"	UR12WD24W Up Light 12 System Watts, Down Light 24 System Watts, 3600 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire	40K 3000K	WH White	Configuration Blank Individual -B Beginner Run -E Ender Run -J Joiner
23P Pendant Mounted			UR18WD36W Up Light 18 System Watts, Down Light 36 System Watts, 5400 Delivered Lumens	DMV FID 0-10V Dimming *Factory installed-Dimming Wire	35K 3500K 40K 4000K 50K 5000K	BK Black SI Silver	
Series		Length	Wattage & Lumen	Driver	Color Temperature	Finish	
Lens Material				Options			
SF Snap In Frosted Acrylic Lens (85% transmission) Special for LEDs, Only available for uplight and downlight				HC301WH Cable kit with 4' Cable & 3 Wires Power Feed/Cable Incl. and White Canopy HC302WH Cable kit with 12' Cable & 3 Wires Power feed/Cable Incl. and White Canopy HC3015WWH Cable kit with 4' Cable & 5 Wires Power Feed/Cable Incl. and White Canopy HC3025WWH Cable kit with 12' Cable & 5 Wires Power feed/Cable Incl. and White Canopy 2SCS24WH Two Stem kits with 24" Stem, Canopy and Mounting hardware for a 4' fixture			

4 FT-UP LIGHT ONLY or DOWN LIGHT ONLY

Example: 23PSF48LUR26W2600LDMV40KWH


23P Wall Mounted	SF	48L 48"	U Up Light Only	DMV 0-10V Dimming *Field installed-Dimming Wire	40K 3000K	WH White	Configuration Blank Individual -B Beginner Run -E Ender Run -J Joiner
23S Surface Mounted			D Down Light Only	DMV FID 0-10V Dimming *Factory installed-Dimming Wire	35K 3500K 40K 4000K 50K 5000K	BK Black SI Silver	
23P Pendant Mounted			Wattage & Lumen	Driver	Color Temperature	Finish	
23R Recess Mounted, Flangeless			R26W2600L 26 System Watts, 2600 Delivered Lumens				
23RR 1/2" Recess Flanged For Before Drywall installation			R38W3800L 38 System Watts, 3800 Delivered Lumens	Options			
23RF Flanged For Exiting Drywall installation	SF		R45W4500L 45 System Watts, 4500 Delivered Lumens	HC301WH Cable kit with 4' Cable & 3 Wires Power Feed/Cable Incl. and White Canopy HC302WH Cable kit with 12' Cable & 3 Wires Power feed/Cable Incl. and White Canopy HC3015WW Cable kit with 4' Cable & 5 Wires Power Feed/Cable Incl. and White Canopy HC3025WW Cable kit with 12' Cable & 5 Wires Power feed/Cable Incl. and White Canopy 2SCS24WH Two Stem kits with 24" Stem, Canopy and Mounting hardware for a 4' fixture			
Series		Length	Direct/Indirect	Driver	Color Temperature	Finish	
Lens Material				Options			
SF Snap In Frosted Acrylic Lens (85% transmission) Special for LEDs, Only available for uplight and downlight							

*23R-Designed for standard 1" grid. Consult factory for custom made grid size.

HSL - 23 Series

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

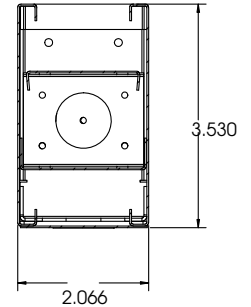

ORDERING INFORMATION

8 FT-UP and DOWN LIGHT

Example: 23WSF96LUR24WD48WDMV40KWH

23W	SF	96L	UR24WD48W	DMV	40K	WH	Configuration
Series		Length		Driver			
23W Wall Mounted		96L 96"		DMV 0-10V Dimming *Field installed-Dimming Wire			Blank Individual
23P Pendant Mounted			Wattage & Lumen	DMVFID 0-10V Dimming *Factory installed-Dimming Wire	Color Temperature	Finish	-B Beginner Run -E Ender Run -J Joiner
			UR24WD48W Up Light 24 System Watts, Down Light 48 System Watts, 7200 Delivered Lumens		30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BK Black SI Silver	
			UR36WD72W Up Light 36 System Watts, Down Light 72 System Watts, 10800 Delivered Lumens				
Lens Material				Options			
SF Snap In Frosted Acrylic Lens (85% transmission) Special for LEDs, Only available for uplight and downlight				HC301WH Cable kit with 4' Cable & 3 Wires Power Feed/Cable Incl. and White Canopy			
				HC302WH Cable kit with 12' Cable & 3 Wires Power feed/Cable Incl. and White Canopy			
				HC3015WWH Cable kit with 4' Cable & 5 Wires Power Feed/Cable Incl. and White Canopy			
				HC3025WWH Cable kit with 12' Cable & 5 Wires Power feed/Cable Incl. and White Canopy			
				2SCS24WH Two Stem kits with 24" Stem, Canopy and Mounting hardware for a 4' fixture			

8 FT-UP LIGHT ONLY or DOWN LIGHT ONLY

Example: 23PSF96LUR52W5200LDMV40KWH

23P	SF	96L	U	R52W5200L	DMV	40K	WH	Configuration
Series		Length	Direct/Indirect		Driver			
23W Wall Mounted		96L 96"	U Up Light Only D Down Light Only		DMV 0-10V Dimming *Field installed-Dimming Wire			Blank Individual
23S Surface Mounted				Wattage & Lumen	DMVFID 0-10V Dimming *Factory installed-Dimming Wire	Color Temperature	Finish	-B Beginner Run -E Ender Run -J Joiner
23P Pendant Mounted				R52W5200L 52 System Watts, 5200 Delivered Lumens		30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BK Black SI Silver	
23R Recess Mounted, Flangeless				R76W7600L 76 System Watts, 7600 Delivered Lumens				
23RR 1/2" Recess Flanged For Before Drywall installation				R90W9000L 90 System Watts, 9000 Delivered Lumens				
23RF Flanged For Exiting Drywall installation								
Lens Material				Options				
SF Snap In Frosted Acrylic Lens (85% transmission) Special for LEDs, Only available for uplight and downlight				HC301WH Cable kit with 4' Cable & 3 Wires Power Feed/Cable Incl. and White Canopy				
				HC302WH Cable kit with 12' Cable & 3 Wires Power feed/Cable Incl. and White Canopy				
				HC3015WWH Cable kit with 4' Cable & 5 Wires Power Feed/Cable Incl. and White Canopy				
				HC3025WWH Cable kit with 12' Cable & 5 Wires Power feed/Cable Incl. and White Canopy				
				2SCS24WH Two Stem kits with 24" Stem, Canopy and Mounting hardware for a 4' fixture				

*23R-Designed for standard 1" grid. Consult factory for custom made grid size.


HSL - 23 Series

Dimensions

All dimensions are inches. Specifications subject to change without notice

WALL MOUNT 48L Drawing



.875 KNOCKOUT DISTANCES

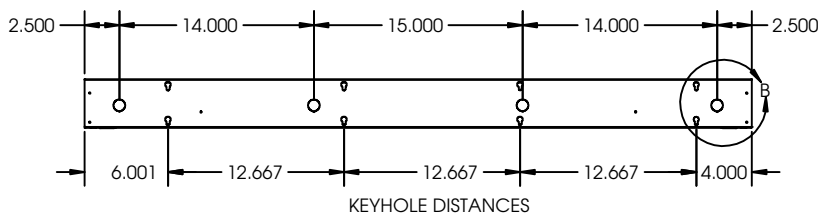

Surface mounted/ Pendant mounted Up
or Down Light

SURFACE MOUNT 96L Drawing

.500 KNOCKOUT DISTANCES

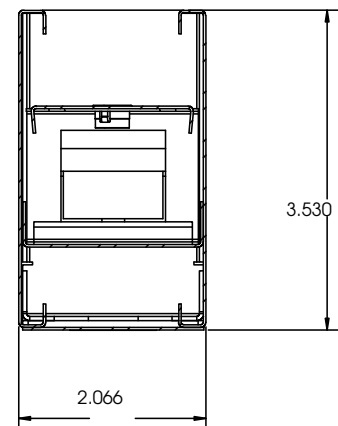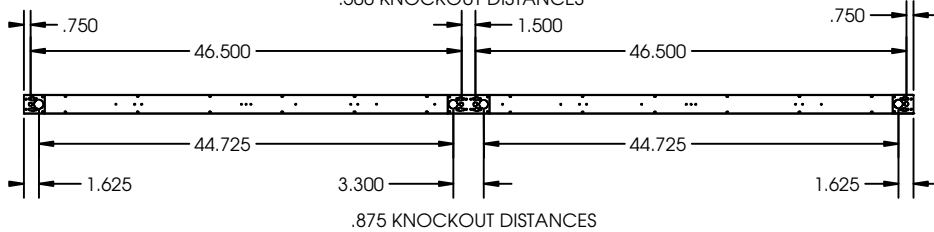

*Consult factory for more options.

Plug in system Options - it's for continuous run application by simply plugging in sections together

Part Number	Descriptions
PI1	3 Wires Harness, Including White, Black and Green
PI2	4 Wires Harness, Including White, Black, Green and Blue for Emergency Battery Backup
PI3D	5 Wires Harness, Including White, Black, Green, Violet and Gray

* Add the accessories part numbers at the end to be factory installed

HSL - 23 Series


Dimensions

All dimensions are inches. Specifications subject to change without notice




Flange Details

Type RR
Recess for Drywall/
Hard Ceiling
-RR (1/2 inch)
-RR650 (5/8 inch)
-RRxxx (custom depth)




Flangeless
Appearance

Type RF
Flush for Drywall



Flanged
Appearance

Type R
For 1" T-bar



Flangeless
Appearance

Recessed Mount (RR)

*consult factory for custom flange depth

