

HSL 555 Series

LED Ceiling/Wall Mount Luminaire

LED Ceiling/Wall Mount Luminaire

SPECIFICATIONS:

Stylish ceiling/wall mounted luminaire in either white or walnut body finishes with a variety of LED combinations and sizes. This sleek contemporary square fixture is enhanced by a linear sided acrylic diffuser. This fixture is versatile - mounting to the ceiling or to a wall, and can be used for many applications including: baths, kitchens, rec rooms, corridors, aisles, stairwells, over or beside mirrors, over bulletin boards, in vanities and in displays.

CONSTRUCTION:

All metal parts are die-formed from heavy gauge cold rolled steel with overlapping end caps to ensure uniformity and dimensional stability.

MOUNTING:

Back plate provided with adequate knockouts and mounting holes for either wall or ceiling installation.

TYPICAL OPTIONS & ACCESSORIES:

Custom finishes, internal divider, front baffle, pull chains, convenience outlets. Contact factory for custom options.

DIMENSIONS

4.50"H x 5.62"W x 24.0"L

4.37"H x 4.54"W x 48.3"L

FEATURES & BENEFITS

- Linear sided prismatic lens of extruded acrylic for controlled light.
- The LED color spectrum illuminates indoor building stairways perfectly.
- Suitable for dry and damp locations
- 50,000 hrs of L70 LED life
- CRI >80
- 0-10 Volt dimmable 120-277V
- Power factor 0.99
- 5 year warranty

LITE Technology
2055 Luna Rd. Suite 142 Carrollton, TX 75006
Phone: 972-247-3171 ext 2056
www.litetechnology.com email: info@litetechnology.com



HSL 555 Series

LED Ceiling/Wall Mount Luminaire



ORDER INFORMATION

HSL 555 - 2 FT

Example: HSL555MW24LF24W2400LDMV40KWH

SERIES	LENS MATERIAL	LENGTH	WATTAGE & LUMENS	DIVIDER & FRONT SHIELD	DRIVER	
HSL 555	A	24L 24"	F24W2400L	Blank No divider D Divider only F Front shield only T Top shield only DF Divider & front shield TF Top & front shield	DMV 0-10V Dimming	
						24 Watts 2400 Lumens
	MW		F28W2700L			28 Watts 2700 Lumens
			F35W3200L	35 Watts 3200 Lumens		

COLOR	FINISH	OPTIONS
30K 3000K	WH White	SW2 Pull chain, 2 way switching (Use with single ballasts) GCO Grounded convenience outlet (North American 3 prong)
35K 3500K	OAK Simulated oak painted finish	
40K 4000K	WAL Simulated walnut painted finish	
50K 5000K	CH Chrome finish	
	CHEND Chrome finish on end caps only	

ORDER INFORMATION

HSL 555 - 4 FT

Example: HSL555MW48LF48W6000LDMV50KWH

SERIES	LENS MATERIAL	LENGTH	WATTAGE & LUMENS	DIVIDER & FRONT SHIELD	DRIVER	
HSL 555	A	48L 48"	* F30W4100L	Blank No divider D Divider only F Front shield only T Top shield only DF Divider & front shield TF Top & front shield	DMV 0-10V Dimming	
						30 Watts 4100 Lumens
	MW		* F48W6000L			48 Watts 6000 Lumens
			* F57W6900L	57 Watts 6900 Lumens		

COLOR	FINISH	OPTIONS
30K 3000K	WH White	SW2 Pull chain, 2 way switching (Use with single ballasts) GCO Grounded convenience outlet (North American 3 prong)
35K 3500K	OAK Simulated oak painted finish	
40K 4000K	WAL Simulated walnut painted finish	
50K 5000K	CH Chrome finish	
	CHEND Chrome finish on end caps only	




HSL 555 Series

DLC Listed Items


ITEM NUMBER
HSL555A48LF30W4100LDMV30K
HSL555A48LF30W4100LDMV35K
HSL555A48LF30W4100LDMV40K
HSL555A48LF30W4100LDMV50K
HSL555A48LF48W6000DMV30K
HSL555A48LF48W6000DMV35K
HSL555A48LF48W6000DMV40K
HSL555A48LF48W6000DMV50K
HSL555A48LF57W6900LDMV30K
HSL555A48LF57W6900LDMV35K
HSL555A48LF57W6900LDMV40K
HSL555A48LF57W6900LDMV50K

DRAWINGS & IMAGES

2 Ft. - Back

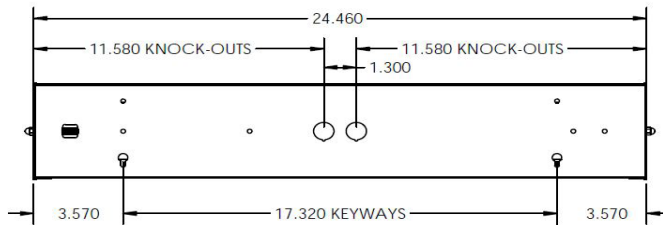

4 Ft. - Back

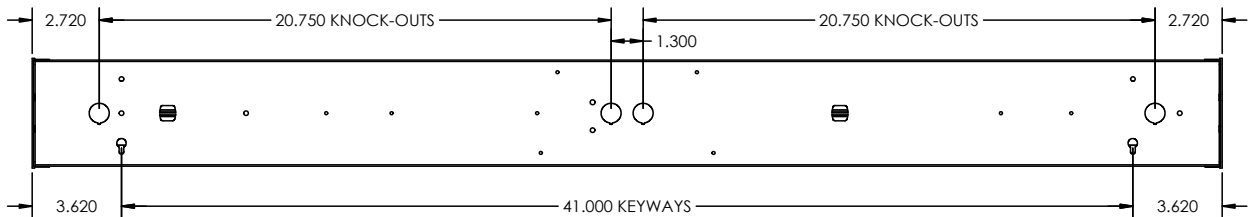

End

