

HSL 555 QUIK LED SERIES

Ceiling/Wall Mount

FEATURES & SPECIFICATIONS:

Stylish ceiling/wall mounted luminaire in either white or walnut finish with a variety of lamp combinations and sizes enhanced by linear sided acrylic diffuser. Designed for baths, kitchens, rec rooms, corridors, aisles, stairwells, over or beside mirrors, over bulletin boards, in vanities, in displays. The QUIK LED / X1 LED 555 Series utilizes efficient LED T8 lamps that provide great lumen output and energy savings. Since they don't require any ballast or driver the only component that will ever need changing is the LED T8 lamp. The lamps are warranted for five years. Unlike 555 series that utilize LED arrays and drivers these fixtures have the flexibility to change wattage, lumens, and color temperature simply by changing the lamps without the need to call a licensed electrician.

QUIK LED / X1 LED

The most economical, practical and user friendly series of LED Fixtures offering energy savings, quality of light, long life and hassle-free maintenance. QUIK LED / X1LED fixtures are UL Listed with the latest LED T8 Bypass lamps. With no ballast to manage, this system offers the maximum flexibility and as T8 LED Lamp Technology continues to improve simply change the lamp to achieve additional energy savings or color temperature changes. Simple, Easy & Long Lasting!

LAMP SPECIFICATIONS

Our T8 LED Lamps are available in 2, 3 or 4 ft Sizes in different wattages, lumens and color temperatures. Savegreen Lighting is a premier supplier of LED T8 Lamps and makes a variety of Bypass T8 LED Lamps to meet the needs of your special application. We continue to develop New Options with more energy savings, and our line continues to grow. We are offering or soon will be offering: 9.8, 10.5, 12, 15, 18 and 26 Watt Options in the 4 ft version. Double ended LED T8 Lamps are also available. See lamp options and specs at: www.savegreenlighting.com

Emergency Options:


The standard X1 LED Lamps require an inverter or an emergency driver that includes LED array, battery and driver. Dimmable T8 LED with external driver works with standard LED EM. For a 5 watt inverter that is similar to adding a 500 Lumen emergency in a conventional fluorescent fixture, add "INV5W" to the end of the item number. This will allow 5 watts of one lamp to work in emergency mode. Or add "EMKT12" to the end of the item number to get a 12W stand alone emergency kit in the fixture that comes with a driver, battery and small LED array that works in Emergency mode. See emergency options and specs at www.saylite.com.

Catalog Number:

Notes:

X1 / **EI** \neq **>76**

The Simple LED Solution

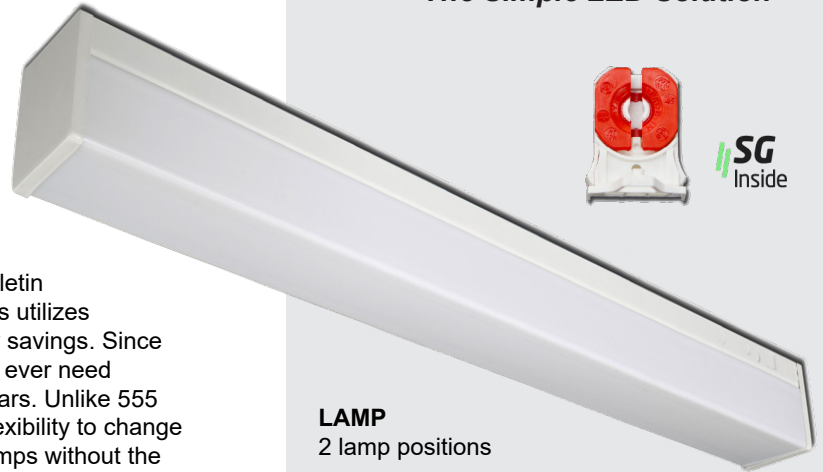

LAMP

2 lamp positions

CONSTRUCTION

All metal parts are die formed from heavy gauge cold roll steel with overlapping end caps to ensure uniformity and dimensional stability. One light and two light units have the same external dimensions.

MOUNTING

Back plate provided with adequate knockouts and mounting holes for either wall or ceiling installation.

WIRING

Standard ballast is 120volts, 60 hertz.

SIZE W x L x H in inches

4.50H x 4.375W

Available in 24", 36", and 48" lengths

Optional Dimming Options:

The 4 FT lamps are available with two dimming options; Specially designed dimming lamps require an external driver that runs 1 or 2 lamps. So more than 2 lamps require multiple external drivers or Consult for Bypass Type B lamps that can be dimmed without any external driver and dim with standard 2 wire dimming. See dimming options and specs at www.savegreenlighting.com



Series HSL 555 QUIK LED

X1 / **EI** \neq **>76**

Ordering Options

Fixtures below include LED T8 Lamp LT8ABP48L18W2250LXXK. For Other Lamp Options See below and Replace LNXXX with short code below. Specify without Lamps by removing LNXXX.

ITEM NO.	DESCRIPTION
555MW132X1LN18W40	4ft. Wall 2100 Lumen 1x18W LED T8 4000K Lamps Included
555MW232X1LN18W40	4ft. Wall 4200 Lumen 2x18W LED T8 4000K Lamps Included

For 5W Emergency, Add INV5 at the End of Item Number for KTEMRGLED5500AC. See other options at www.saylite.com
 For fixtures wired for double ended lamps, change X1 to X2 and see the Savegreen Lamps below for the proper Double Ended Lamp.
 For fixtures without lamps included, remove the "LNXXX" at the end of the item number and have X1 or X2 for Single or Double Ended wiring.
 For fixtures with different lamp wattage and lumen options, see chart below or consult sales representative (LITE Technology)
 "MW" denotes Smooth White Acrylic lens - Revise to "A" for a Clear Plastic Acrylic Lens.

LN18W40 - Lamp Specification

50,000 Hour Life with 5 Year Warranty
 Beam Angle 140 Degree
 Aluminum Base and Aluminum Housing with Glass Cover
 Operating Temperature: - 20C to 50C
 Color Temperature: 3500K, 4000K, 5000K
 G13 Pins (Same as Fluorescent Linear T8 Bipin)
 AC100 – 277V without Ballast
 Single Ended or Double Ended Power (If not specified use X1 Single Ended Power)

Savegreen T8 or T5 LED Lamp Options

To include one of these lamps in fixture, remove "LNXXX" and add Savegreen Inside code below.
 (See www.savegreenlighting.com for specification sheets or more information on these lamp options.)

Please consult your sales specialist for New Lamp Codes for lamps not shown on the chart below.

VERSION	SAVEGREEN INSIDE	SAVEGREEN ITEM NO.
Popular	SGB15W35	LT8BG48L15W1740LXXK
Standard	SGS29W35	LT8BGC24L9W1050LXXK
Standard	SGS312W35	LT8BGC36L12W1200LXXK
Standard	SGS15W35	LT8BGC48L15W1740LXXK
Premium	SGP12W35	L10T8BGC48L12W1750LXXK
Premium	SGP15W35	L10T8BGC48L15W2000LXXK
Premium	SGP18W35	L10T8BGC48L18W2500LXXK
High Output	SGH26W40	LT8BGC48L26W3500LXXK
Double Ended	SGD18W35	LT8BDGC48L18W2100LXXK
T5HO	SGT525W40*	LT5BG46L25W3300LXXK
Magic	SGM18W35K	LT8ABP48L18W2250LXXK
Magic	SGM18W35K	LT8ABP48L15W1875LXXK
Magic	SGM215W35K	LT8ABP24L15W1875LXXK

Special
WARRANTY

Consult Lite for Options

Change 35 to 40 or 50 for different Kelvin.
 *For T5, CCT 40K and 50K available.



Consult Factory for Dimmable Lamp Options. Dimmable lamps that operate on Drivers carry a 5 year Warranty.

LITE Technology
 2055 Luna Rd. Suite 142 Carrollton, TX 75006
 Phone: 972-247-3171 ext 2056
www.litetechnology.com email: info@litetechnology.com

Catalog Number:
Notes: