

Series HSL CV800

High Abuse Fixture

FEATURES & SPECIFICATIONS

INTENDED USE

This rough service fixture provides great general illumination. Mounting can include on walls or ceiling as a surface type luminaire. The HSL CV800 fluorescent or ballasted fixture will also work perfectly with T8 or T5 LED Tubes. Applications include: parking garages, school corridors or any where high abuse or vandalism could occur.

Construction


Back plate is die formed of 16 gauge steel. Lens attached to back plate with tamper resistant stainless steel screws.

Mounting

Units may be surface or wall mounted.

Listing

Fixtures conform to Underwriters' Laboratories standards for production and are carefully tested prior to packing. Fixtures are UL Listed wet location for ceiling and damp location for wall mounting.

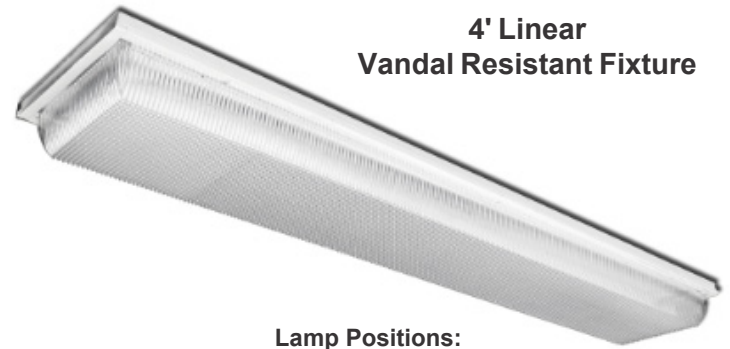

**4' Linear
Vandal Resistant Fixture**

Lamp Positions:
2 or 3 lamps

Diffuser

Diffuser is made of injection molded UV stabilized 100% clear, polycarbonate with an internal prismatic pattern.

Electrical

Sufficient knockouts are provided on the back for all connections and through wiring.

ORDERING INFORMATION

Example: HSLCV800 2328ZLMV

Series	Lamp Count	Lamp Type
HSLCV800	2	32 48" F32T8
	*3	28 46" T5
		54 46" T5 HO

May also specify LED Tube Products. Consult your sales specialist.

Example:
4' TLED GE LED15ET8/4/840

Ballast & Voltage [1]
MV Electronic, Multivolt (120-277)
HMV Electronic MV, HBF
LMV Electronic MV, LBF
ZPSHV03 Program Start High Ballast GE 2L #75383 GE 4L #75385

For Specific Manufacturer - Add noted letter (below) before the ballast code:

Z - GE V - Advance
F - Universal Y - Sylvania

Example: ZHMV (GE HBF Multi Volt)

Options [1]
WP 6ft. 3 wire 18 gauge whip
WP10 6ft. 4 wire 18 gauge whip
EM Emergency ballast 500 lumens
EM14 Emergency ballast 1400 lumens
D Ballast disconnect
LN15W40 Single ended 15W 1800 Lumen 4000K* Included
LN18W40 Single ended 18W 2100 Lumen 4000K*

*Change 40 to 35 or 50 for 3500K or 5000K

*3 - only available in T8

