

STANDARD

OPTIONAL



ILLUMINATION

- Long life, efficient, ultra bright white LED.
- 6W (2 LEDs x 3.0 watt) per unit.
- Mirror-bright reflector and prismatic polycarbonate refractor.
- Can be used as a Normally-ON or Normally-OFF light as well as on a switched circuit.

ELECTRICAL

- Universal 120-277VAC voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Self-diagnostic test feature continually diagnoses units performance and tests system to ensure reliable operation and to meet electrical and life safety codes.
- Field-selectable wiring allows for "AC" operation of the unit to be controlled using a wall-switch or a photocell or any other switching mechanism.

MOUNTING

- Surface mount via easy connect back plate that fits most standard size junction boxes.
- Universal K/O pattern on back plate for wall mount.
- Threaded opening at the top of the enclosure for conduit mount.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (0°C – 50°C).

ORDERING INFORMATION

MODEL	HOUSING COLOR			OPTIONS
DBEL-ACEM	W White	SDT	Self-Diagnostics (standard)	CW Cold Weather
	B Black			PC Photocell Sensor
	BR Dark Bronze			
	N Nickel			

Sample Part Number: **DBEL-ACEM-BR-SDT**

HSL DBEL Series

Decorative LED AC/Emergency Unit




HOUSING

- Decorative, Low Profile, architectural design.
- Die-cast aluminum housing.
- Durable powder-coated finishes in white, black, nickel and dark bronze.
- Sealed and gasketed.

OPTIONS

- CW: Optional internal heater for extreme cold temperature applications (-20°C – 50°C).
- PC: Unit features optional photocell technology that automatically responds to low exterior lighting levels in "AC" mode.

DIMENSIONS

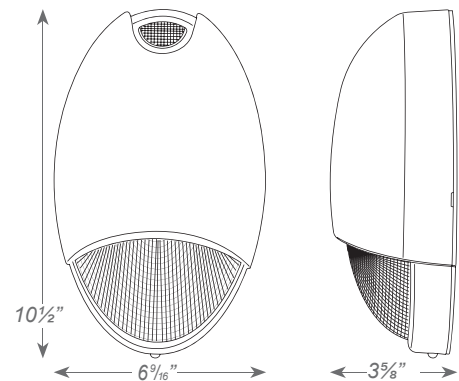

Catalog Number
Notes:

HSL DBEL Series

Decorative LED AC/Emergency Unit


ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
DBEL-ACEM SDT (w/AC on)	9.0	8.89	0.131	0.068
DBEL-ACEM SDT (w/AC off)	2.04	2.15	0.035	0.022
DBEL-ACEM SDT-CW (w/AC on)	18.47	58.89	0.210	0.248
DBEL-ACEM SDT-CW (w/AC off)	11.51	52.15	0.114	0.202
DBEL-ACEM SDT-PC (w/AC on)	9.0	8.89	0.131	0.068
DBEL-ACEM SDT-PC (w/AC off)	2.04	2.15	0.035	0.022
DBEL-ACEM SDT-CW-PC (w/AC off)	18.47	58.90	0.210	0.248
DBEL-ACEM SDT-CW-PC (w/AC off)	11.51	52.15	0.114	0.202

CENTER-TO-CENTER SPACING GUIDELINES

Consult factory.

WIRING DIAGRAM

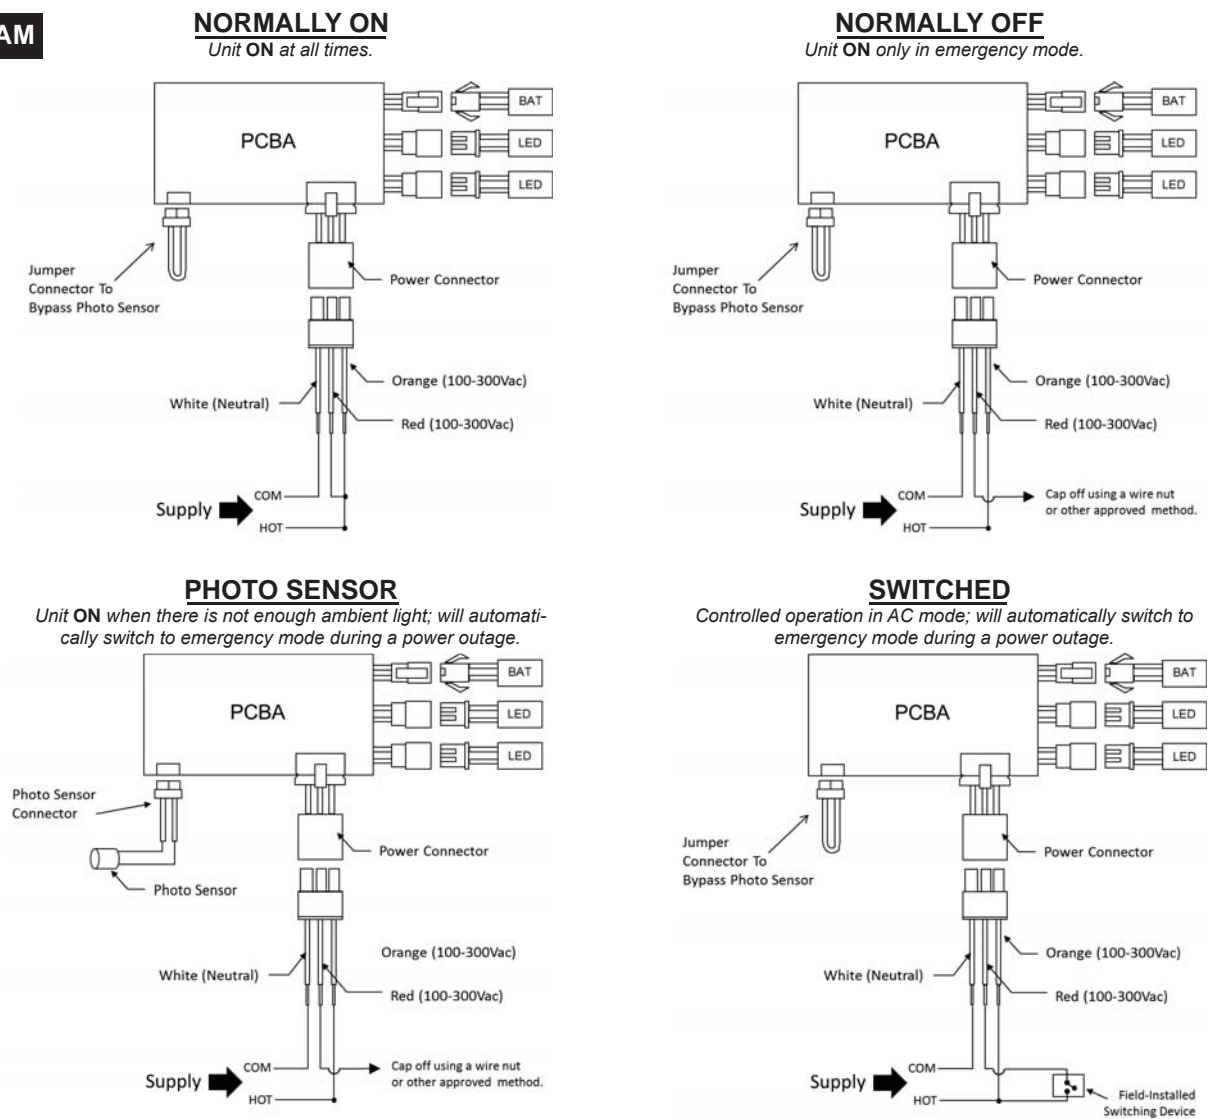

Catalog Number
Notes: