

HSL DC150SR Series

Economy LED Wall Pack

Applications


- Security, pathway and perimeter lighting
- Building entryways and walkways

Features

- Sealed die-casting profile for outdoor applications
- Replacing 100-175W MH
- Lumen output from 5300-8100lm
- Multitude of voltage configurations: 100-277V and 347V
- Polycarbonate optical lens with UV stabilizers
- Built-in UL class 2 driver, optional for photocell
- Easy installation, contractor-friendly design
- UL/cUL Wet location listed



Accessories



Vandal Shield
DC150VS


Wire Guard
DC150WG

Visor
DC150SHIELD


Photometrics

HSL DC150SR45W4900LMV50K

Luminous Intensity Distribution Curve




Illuminance at a Distance




HSL DC150SR70W7900LMV50K

Luminous Intensity Distribution Curve






Illuminance at a Distance



Dimensions

All dimensions are inches. Specifications subject to change without notice

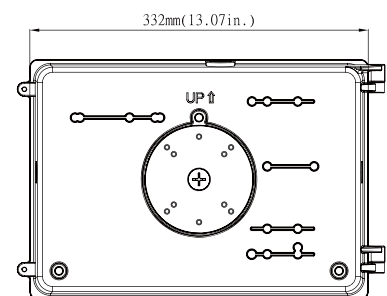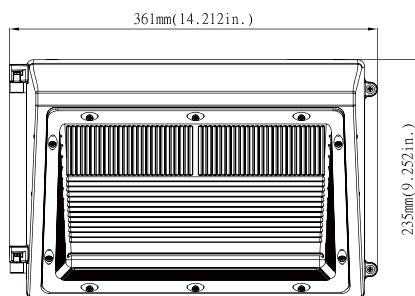

ORDERING INFORMATION

Example: HSL DC150SR45W4900LMV50K

HSL DC150SR

Series

HSL DC150SR

45W4900L

Wattage and Lumen

45W4900L 45 System Watts,
4950 Delivered Lumens
70W7900L 70 System Watts,
7900 Delivered Lumens

MV

Driver

MV Multi - Volt
120V-277V

50K

Kelvin Temperature

50K 5000K