

HSL DID Series

LED Direct/Indirect Linear Strip

FIXTURE DESCRIPTION:

Medium body decorative strip with reflector and lens or basket options. Aesthetically pleasing with sleek lines, this fixture is perfect for: offices, conference rooms, retail and even utility areas requiring concentrated illumination. This is fixture can be used for commercial or industrial applications as it provides flexibility and can be mounted in continuous runs. By choosing the reflector types and basket or lens materials, the lighting designer can create a unique environment.

CONSTRUCTION

Housing is die-formed and embossed code 22 gauge steel. Body finish is high reflectance baked white enamel. Wiring knockouts are provided on back and end of housing. Reflectors attach with quarter turn fasteners; no tools required for ballast access. End plate doubles as coupler for continuous row mounts. Reflectors available in several materials. Perforated metal reflectors and baskets are made of cold rolled steel treated with rust inhibitor. Perforated metal parts are post painted with a durable baked polyester coat. Each piece is formed by our state of the art multi-radii machine for consistency.

MOUNTING

Surface mount, chain hung, stem mount

TYPICAL OPTIONS & ACCESSORIES

Whips, fuses and wire guards. Contact factory for more details.



DIMENSIONS

Fixture width and height vary with reflector selection.

Fixture length=48 inch length


FEATURES & BENEFITS

- P10 - perforated reflector
- W30 - economical white steel reflectors, for abusive locations
- Suitable for dry and damp locations
- 50,000 hrs of L70 LED life
- CRI>80
- 0-10 Volt dimmable 120-277V
- Power factor 0.99
- 5 year warranty


HSL DID Series

LED Direct/Indirect Linear Strip


DRAWINGS & IMAGES

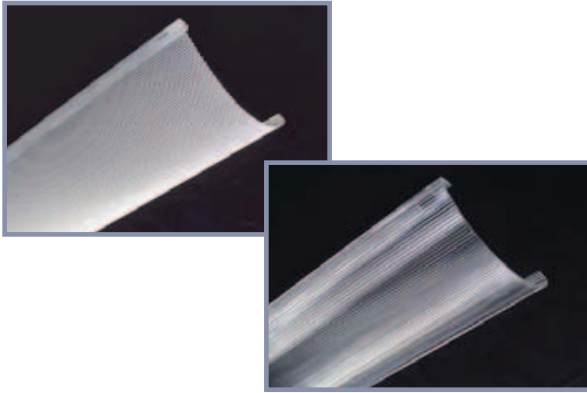


Basket Options



Smooth
White Lens




Fine Fluted
Lens




Perforated

Back

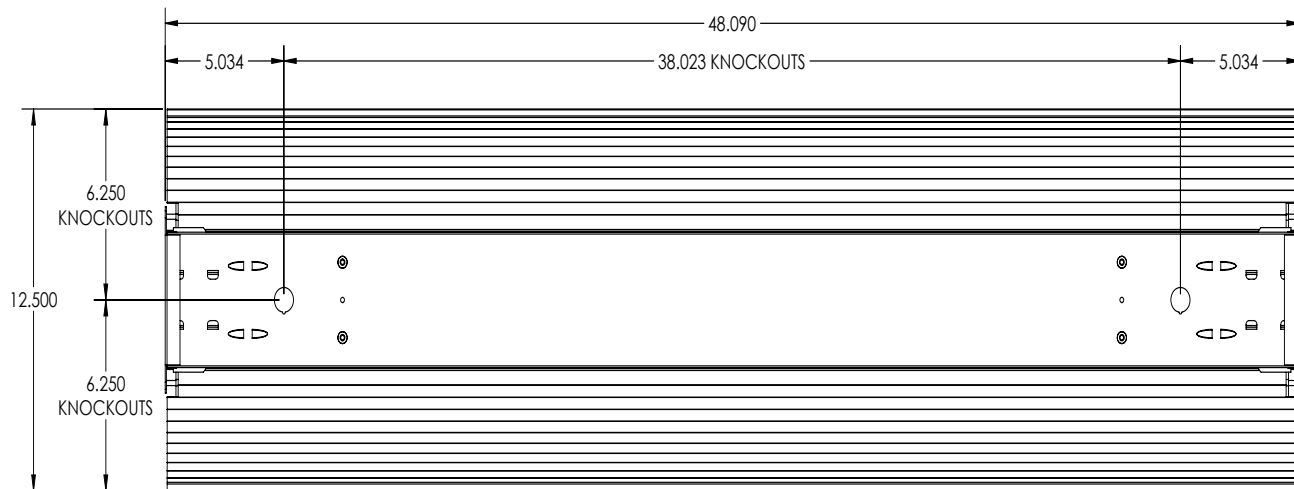

End

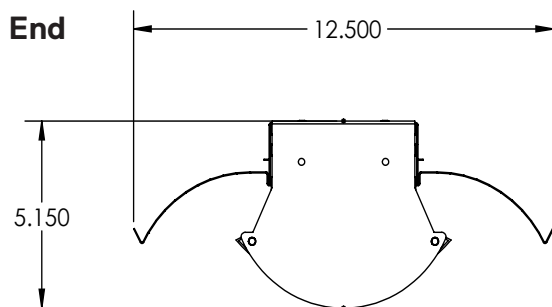

HSL DID Series

LED Direct/Indirect Linear Strip

ORDER INFORMATION

Standard

SERIES	SIZE	WATTAGE & LUMEN	REFLECTORS	BASKET TYPE	DRIVER	COLOR
HSL DID	48L 48"	S32W3450L 32 Watts 3450 Lumens	W30 White Steel	BP Perforated BF Fine Fluted Lens BL Smooth White Lens	DMV 0-10V Dimming	30K 3000K
		S48W4800L 48 Watts 4800 Lumens				35K 3500K
		S57W5400L 57 Watts 5400 Lumens				40K 4000K
		H72W7000L 72 Watts 7000 Lumens				50K 5000K
		* *				

OPTIONS

WP	6 ft. 3 wire 18 gauge whip
WP10	6 ft. 4 wire 18 gauge whip



Note:

*Programmable LED drivers allow custom configured wattages and corresponding lumens.

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.