

HSL - DKS

2"W Low Profile LED Surface Mount

FEATURES & SPECIFICATIONS

INTENDED USE

Full body micro silhouette makes a bold statement with a minimal design in brushed nickel powder coated finish (consult factory for other finishes). Scaled to the LED module the matte white diffuser surrounds the LEDs for soft lighting. Brushed nickel fixture can be surface mounted on wall or ceiling or pendant mounted with specially engineering cable mounting kit.

SIZE L x W x D in inches

- 22.5", 34.5", 46.25" or 92"L x 2"W x 2.6"D
- 22.5", 34.5", 46.25" or 92"L x 3"W x 3"D

MATERIALS & FEATURES

- Fully assembled housing is formed and welded, 22 gauge steel, chemically treated to resist corrosion and enhance paint adhesion
- Available in brushed nickel. Consult for other finishes
- Available with smooth frosted lens
- Clean body - No knock-outs on sides or ends
- Knock-outs on back accept standard electrical fittings (by others) Consult factory for other locations
- Dimming ballast options available (consult factory for availability and system compatibility)



MOUNTING

Surface mount or Pendant mount.
Horizontal or Vertical.



TYPICAL OPTIONS AND ACCESSORIES

Whips, fuses, and cord sets. See options page at the end of the T02Strip section, or contact factory for more details.

ACCESSORIES


- DKS-HC301WH - 5' cable kit w/white canopy*
- DKS-HC301BN - 5' cable kit w/brushed nickel*
- DKS-HC501BN - 4' Cable Mounting Kit*

*Includes canopy for cable only and a canopy for cable & power chord.


ORDERING INFORMATION

2FT - STANDARD

Example: **DKSFR24LE12W1200LDMV40KWH**

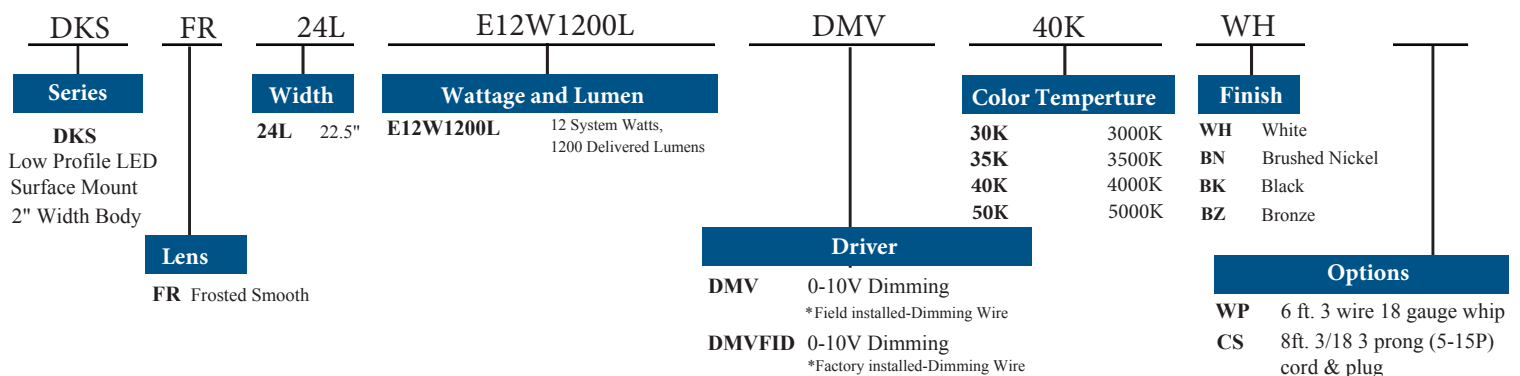

2FT - HIGH OUTPUT

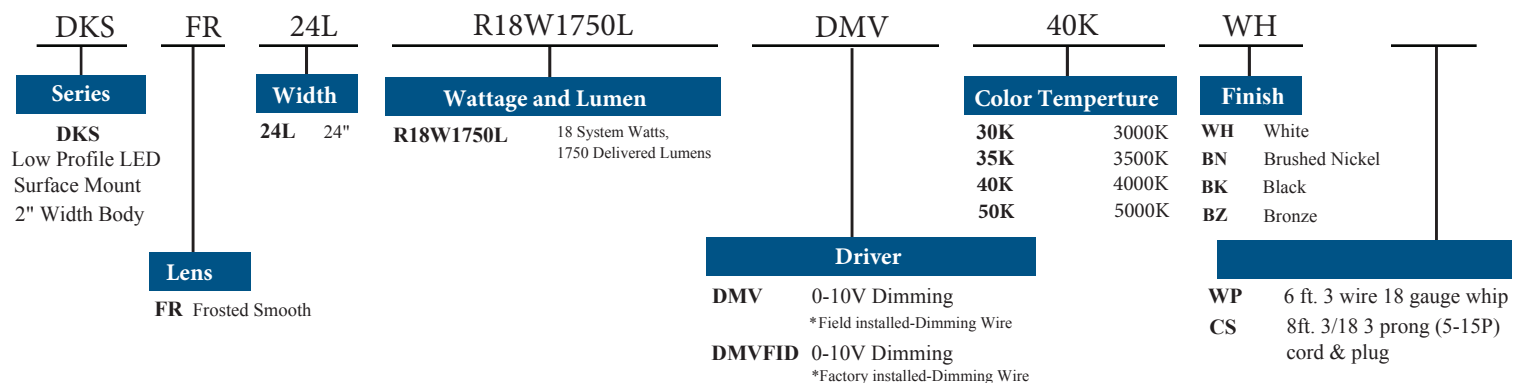

HSL - DKS

4FT - STANDARD

Example: **DKSFR48LE24W2400LDMV40K**

DKS Series DKS Low Profile LED Surface Mount 2" Width Body	FR Lens FR Frosted Smooth	48L Width 48L 46"	E24W2400L Wattage and Lumen E24W2400L 24 System Watts, 2400 Delivered Lumens E28W2700L 28 System Watts, 2700 Delivered Lumens	DMV Driver DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	40K Color Temperature 30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH Finish WH White BN Brushed Nickel BK Black BZ Bronze	Options WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug
--	--	--------------------------------	---	---	---	---	--

4FT - HIGH OUTPUT

DKS Series DKS Low Profile LED Surface Mount 2" Width Body	FR Lens FR Frosted Smooth	48L Width 48L 46"	R35W3400L Wattage and Lumen R35W3400L 35 System Watts, 3400 Delivered Lumens	DMV Driver DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	40K Color Temperature 30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH Finish WH White BN Brushed Nickel BK Black BZ Bronze	Options WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug
--	--	--------------------------------	--	---	---	---	--

8FT - STANDARD

DKS Series DKS Low Profile LED Surface Mount 2" Width Body	FR Lens FR Frosted Smooth	96L Width 96L 92"	E32W3450L Wattage and Lumen E32W3450L 32 System Watts, 3450 Delivered Lumens E48W4800L 48 System Watts, 4800 Delivered Lumens E57W5400L 57 System Watts, 5400 Delivered Lumens	DMV Driver DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	40K Color Temperature 30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH Finish WH White BN Brushed Nickel BK Black BZ Bronze	Options WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug
--	--	--------------------------------	--	---	---	---	--

8FT - HIGH OUTPUT

DKS Series DKS Low Profile LED Surface Mount 2" Width Body	FR Lens FR Frosted Smooth	96L Width 96L 92"	R72W7000L Wattage and Lumen R72W7000L 72 System Watts, 7000 Delivered Lumens	DMV Driver DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	40K Color Temperature 30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH Finish WH White BN Brushed Nickel BK Black BZ Bronze	Options WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug
--	--	--------------------------------	--	---	---	---	--

* Consult FACTORY for more options

HSL - DKS





DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

Hanging Kit Options

DKS-HC301WH - 5' cable kit w/white canopy* DKS-HC301BN - 5' cable kit w/brushed nickel* DKS-HC501BN - 4' Cable Mounting Kit*

*Includes canopy for cable only and a canopy for cable & power chord.

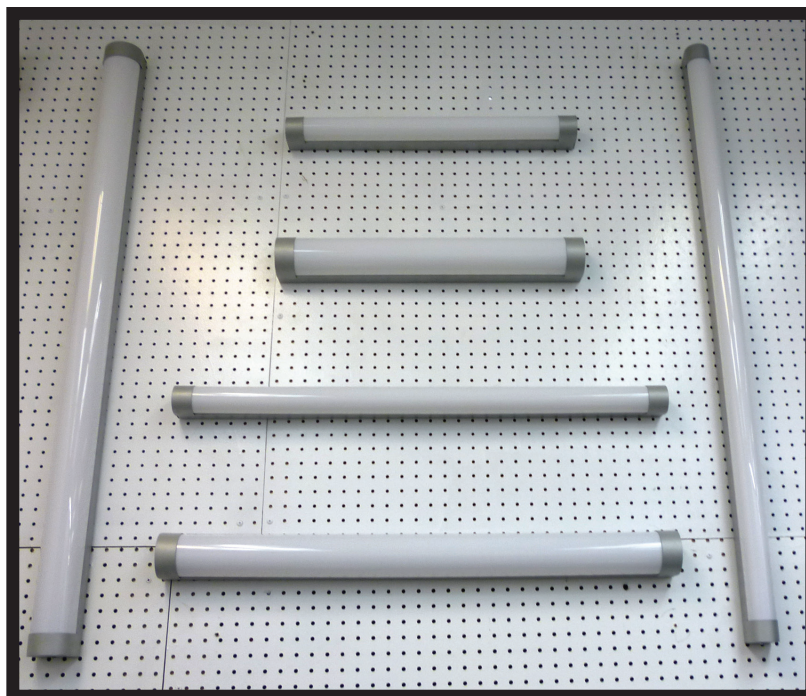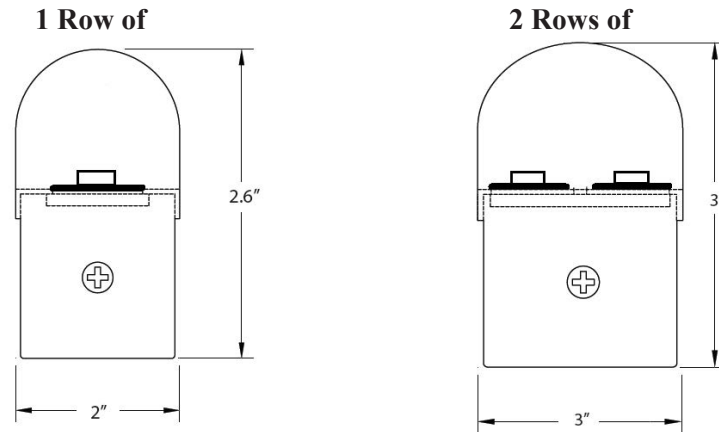

HSL - DKS



DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

SIZE L x W x D in inches

- 22.5" or 46" or 92"L x 3"W x 3"D

ORDERING INFORMATION

Example: **DKSWBMW24LE24W2400LDMV40KBN**

2FT - STANDARD

DKSWB	MW	24L	E24W2400L	DMV	40K	BN	
Series	Lens	Size	Wattage and Lumen	Driver	Color Temperature	Finish	Options
DKSWB Low Profile LED Surface Mount 3" Width Body	MW White Lens FR Frosted Lens	24L 22.5"	E24W2400L 24 System Watts, 2400 Delivered Lumens E28W2700L 28 System Watts, 2700 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BN Brushed Nickel BK Black BZ Bronze	WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug

2FT - HIGH OUTPUT

Example: **SKDWBMW24LR35W3400LDMV40KBN**

DKSWB	MW	24L	R35W3400L	DMV	40K	BN	
Series	Lens	Size	Wattage and Lumen	Driver	Color Temperature	Finish	Options
DKSWB Low Profile LED Surface Mount 3" Width Body	MW White Lens FR Frosted Lens	24L 22.5"	R35W3400L 35 System Watts, 3400 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BN Brushed Nickel BK Black BZ Bronze	WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug

DKS-HC301WH - 5' cable kit w/white canopy*
DKS-HC301BN - 5' cable kit w/brushed nickel*
DKS-HC501BN - 4' Cable Mounting Kit*



*Consult factory for custom finish, varies lumen output availability and system compatibility.

*Includes canopy for cable only and a canopy for cable & power chord.

HSL - DKS

4FT - STANDARD

Example: DKSWBMW48LE40W4000LDMV40KBN

DKSWB	MW	48L	E40W4000L	DMV	40K	BN
Series		Size	Wattage and Lumen	Driver	Color Temperature	Finish
DKSWB Low Profile LED Surface Mount 3" Width Body		48L 46"	E32W3450L 32 System Watts, 3450 Delivered Lumens E40W4000L 40 System Watts, 4000 Delivered Lumens E57W5400L 57 System Watts, 5400 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BN Brushed Nickel BK Black BZ Bronze
	Lens					Options
	MW White Lens FR Frosted Lens					WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug

4FT - HIGH OUTPUT

DKSWB	MW	48L	R72W7000L	DMV	40K	BN
Series		Size	Wattage and Lumen	Driver	Color Temperature	Finish
DKSWB Low Profile LED Surface Mount 3" Width Body		48L 46"	R72W7000L 72 System Watts, 7000 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BN Brushed Nickel BK Black BZ Bronze
	Lens					Options
	MW White Lens FR Frosted Lens					WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug

8FT - STANDARD

DKSWB	MW	96L	E114W11800L	DMV	40K	BN
Series		Size	Wattage and Lumen	Driver	Color Temperature	Finish
DKSWB Low Profile LED Surface Mount 3" Width Body		96L 92"	E114W11800L 114 System Watts, 11800 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BN Brushed Nickel BK Black BZ Bronze
	Lens					Options
	MW White Lens FR Frosted Lens					WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug

8FT - HIGH OUTPUT

DKSWB	MW	96L	R144W14000L	DMV	40K	BN
Series		Size	Wattage and Lumen	Driver	Color Temperature	Finish
DKSWB Low Profile LED Surface Mount 3" Width Body		96L 92"	R144W14000L 144 System Watts, 14000 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BN Brushed Nickel BK Black BZ Bronze
	Lens					Options
	MW White Lens FR Frosted Lens					WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug