

HSL-IND Series

Medium Body Strip with Reflectors

Medium body industrial strip with reflectors for interior warehouse, retail, and utility areas requiring concentrated illumination in a commercial quality configuration

Ordering Information

Series	(Lamps not Included)		
	Lamp Count	Lamp Type [1]	Tandem Code [2]
HSL IND Medium Body Strip with Reflectors	1 or 2	20 24in. T12	
	1 or 2	30 36in. T12	6 6ft. Tandem (Double Lamp Count)
	1 or 2	40 48in. T12 [6]	8 8ft. Tandem (Double Lamp Count)
	1 or 2	F96T12 96in. T12 Slimline	
	1 or 2	F48T12HO 48in. T12	8 8ft. Tandem (Double Lamp Count)
	1 or 2	F72T12HO 72in. T12	
	1 or 2	F96T12HO 96in. T12 [8]	
	1,2, or 3	17 24in. T8	
	1,2, or 3	25 36in. T8	6 6ft. Tandem (Double Lamp Count)
	1,2, or 3	32 48in. T8	8 8ft. Tandem (Double Lamp Count)
	1 or 2	59 96in. F96T8 59W Slimline	
	1 or 2	F48T8HO 48in. T8	8 8ft. Tandem (Double Lamp Count)
	1 or 2	F96T8HO 96in. T8	
	2 or 3	14 22in. T5 [5]	
	2 or 3	21 34in. T5 [5]	
	2 or 3	28 46in. T5 [5]	8 8ft. Tandem (Double Lamp Count)
	2 or 3	24 22in. T5HO [5]	
	2 or 3	39 34in. T5HO [5]	
	2 or 3	54 46in. T5HO [5]	8 8ft. Tandem (Double Lamp Count)

Example: HSL-IND 232 W30 MV

Ballast & Voltage [1]	
E120 or E277 MV	Electronic, 120V or 277V Electronic, Multivolt (120-277)
H120, H277, H MV [4]	Elec. Hi-Lume; 120V, 277V, or MV
L120, L277, L MV [4]	Elec. Lo-Lume; 120V, 277V, or MV
M120 or M277 [6,7]	Magnetic, 120 or 277V
ZH MV	GE Multivolt H Ballast (73190)
Reflectors [3]	
W3 0	White Steel Reflector
W3 0 UP	White Steel Reflector Uplight
W3 5	White Steel Reflector Asymmetric
M2 2	Mirrored Reflector Low Mount
M2 4	Mirrored Reflector Standard Mount
M2 6	Mirrored Reflector High Mount
M2 5	Mirrored Reflector Asymmetric
W1 4	White Aluminum Reflector Standard Mount
W1 6	White Aluminum Reflector High Mount
Options [1]	
WP	6 ft. 3 wire 18 gauge whip
WP10	6 ft. 4 wire 18 gauge whip
EM	Emergency ballast, 500 lumens
EM14	Emergency ballast, 1400 lumens
EM14 ballast req'd for T5HO lamps	

Notes

- [1] See end of T02Strip section for many additional lamps, ballasts, finishes, and options.
- [2] Tandem doubles length and lamp count. Same lamps in cross section, additional lamps end to end.
- [3] Custom reflectors available to create any light distribution.
- [4] HiLume and LoLume ballasts available for T8 lamps only.
- [5] T5 & T5HO S body strips are full 24/36/48/96in length. See KDS series for shorter strips.
- [6] Magnetic ballasts available for T8 & T12 only.
- [7] Standard magnetic T12 ballasts for 48in lamp drive a 34W energy saver. Specify electronic to drive 48in T12 34 or 40W lamp.
- [8] Electronic ballasts ONLY for F96T12HO. See KL series for magnetic F96T12HO ballasts.

HSL-IND Series

Medium Body Strip with Reflectors

SIZE H x W in inches (mm)

- Fixture width and height vary with reflector selection Fixture length = lamp(s) length

Lamp

1, 2, or 3 Lamp Positions in Cross section.

Construction

- Body and ends are die blanked, pierced and formed of 20 guage cold rolled prime steel for rigidity and uniformity. Forming of the housing has been engineered to provide added strength along its entire length. Socket bars and wireway covers snap in place for easy installation and maintenance.

Mounting

- Surface mount, chain hung, double stem. See end of chapter T02Strip for accessory mount kits.

Materials & Features

- Housing is die-formed and embossed code 22 gage steel. Body finish is high reflectance baked white enamel. Wiring knockouts are provided on back and end of housing. Reflectors attach with quarter turn fasteners; no tools required for ballast access. End plate doubles as coupler for continuous row mounts. Reflectors available in several materials. See C Series for similar fixtures with no reflectors.
- W3x, economical white steel reflectors, for abusive locations Three styles: symmetric, symmetric with uplight, and asymmetric
- M2, premium full specular (mirrored) reflectors, for maximum efficiency Four styles: Low (8-10ft), Standard (9-14ft), and High Ceiling (12-24ft), and asymmetric
- W1x, high reflectance white aluminum reflectors, combine economy and efficiency Two styles: Standard (9-14), and High ceiling (12-24ft) symmetric

Listing

- Fixture & Ballast: UL and CUL Listed: Thermally protected, class P, HPF, Non PCB

Typical Options & Accessories






- Emergency ballasts, whips, fuses, and wire guards. See options page at the end of the T02Strip section, or contact factory for more details.

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.



All IND series strips are full 2, 3, 4, 6, or 8 ft. lengths (incl T5 & T5HO)

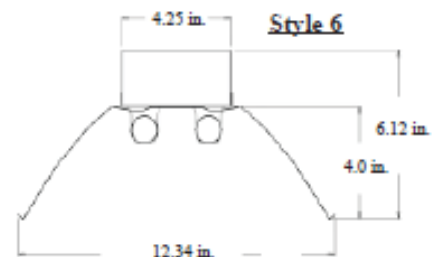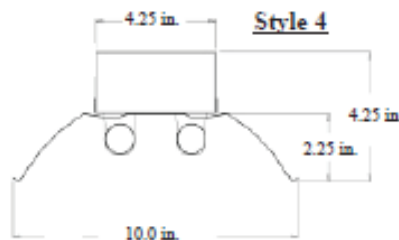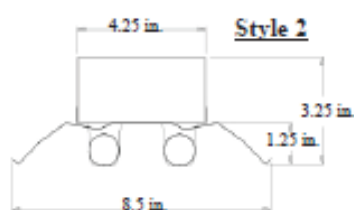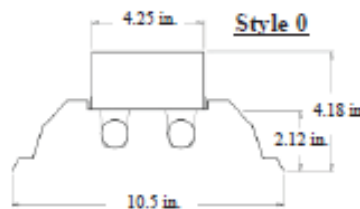

HSL-IND Series

Photometrics

Calculated using the zonal cavity method in accordance with IESNA LM41 procedure.

Lamp configurations shown are typical. Photometric data on these and other configurations available upon request.

Floor	20%	20%	20%	20%	20%	20%	20%	20%	20%
Ceiling	80%	80%	80%	70%	70%	70%	50%	50%	50%
Wall	70%	50%	30%	70%	50%	30%	50%	30%	10%
RCR	Zonal cavity coefficients			CUIND23	Spacing ratio, Along 1.3 Across 1.5				
0	0.98	0.98	0.98	0.95	0.91	0.91	0.87	0.87	0.88
1	0.89	0.84	0.80	0.83	0.79	0.73	0.76	0.73	0.71
2	0.81	0.73	0.66	0.71	0.68	0.59	0.65	0.61	0.58
3	0.73	0.63	0.55	0.62	0.59	0.48	0.57	0.52	0.47
4	0.67	0.55	0.47	0.54	0.52	0.41	0.50	0.45	0.40
5	0.61	0.49	0.41	0.48	0.46	0.34	0.45	0.39	0.34
6	0.56	0.44	0.36	0.43	0.41	0.30	0.40	0.34	0.29
7	0.52	0.39	0.32	0.39	0.37	0.26	0.36	0.30	0.26
8	0.48	0.36	0.29	0.35	0.34	0.23	0.33	0.27	0.23
9	0.45	0.33	0.26	0.32	0.31	0.21	0.30	0.25	0.21
10	0.42	0.30	0.23	0.30	0.29	0.19	0.28	0.23	0.19

Floor	20%	20%	20%	20%	20%	20%	20%	20%	20%
Ceiling	80%	80%	80%	70%	70%	70%	50%	50%	50%
Wall	70%	50%	30%	70%	50%	30%	50%	30%	10%
RCR	Zonal cavity coefficients			CUIND23	Spacing ratio, Along 1.3 Across 1.3				
0	1.09	1.09	1.08	1.07	1.01	1.01	0.97	0.97	0.97
1	0.99	0.93	0.89	0.91	0.87	0.80	0.84	0.81	0.78
2	0.89	0.80	0.73	0.79	0.75	0.65	0.72	0.68	0.64
3	0.81	0.70	0.61	0.68	0.65	0.53	0.63	0.57	0.52
4	0.74	0.62	0.53	0.60	0.58	0.45	0.56	0.50	0.45
5	0.68	0.55	0.46	0.54	0.52	0.38	0.50	0.43	0.38
6	0.62	0.49	0.40	0.48	0.46	0.33	0.45	0.38	0.33
7	0.58	0.44	0.36	0.43	0.42	0.29	0.41	0.34	0.29
8	0.54	0.40	0.32	0.40	0.38	0.26	0.37	0.31	0.26
9	0.50	0.37	0.29	0.36	0.35	0.24	0.34	0.28	0.23
10	0.47	0.34	0.26	0.33	0.33	0.21	0.32	0.25	0.21

Floor	20%	20%	20%	20%	20%	20%	20%	20%	20%
Ceiling	80%	80%	80%	70%	70%	70%	50%	50%	50%
Wall	70%	50%	30%	70%	50%	30%	50%	30%	10%
RCR	Zonal cavity coefficients			CUIND23	Spacing ratio, Along 1.3 Across 1.5				
0	1.01	1.01	1.01	0.98	0.94	0.94	0.90	0.90	0.90
1	0.92	0.87	0.83	0.85	0.82	0.75	0.78	0.76	0.73
2	0.83	0.75	0.68	0.73	0.70	0.61	0.67	0.63	0.60
3	0.75	0.65	0.57	0.64	0.61	0.50	0.59	0.53	0.49
4	0.69	0.57	0.49	0.56	0.54	0.42	0.52	0.46	0.42
5	0.63	0.51	0.42	0.50	0.48	0.36	0.46	0.40	0.35
6	0.58	0.45	0.37	0.44	0.43	0.31	0.41	0.35	0.31
7	0.53	0.41	0.33	0.40	0.39	0.27	0.38	0.31	0.27
8	0.50	0.37	0.30	0.37	0.36	0.24	0.34	0.28	0.24
9	0.46	0.34	0.27	0.34	0.33	0.22	0.32	0.26	0.21
10	0.43	0.31	0.24	0.31	0.30	0.19	0.29	0.23	0.19

Floor	20%	20%	20%	20%	20%	20%	20%	20%	20%
Ceiling	80%	80%	80%	70%	70%	70%	50%	50%	50%
Wall	70%	50%	30%	70%	50%	30%	50%	30%	10%
RCR	Zonal cavity coefficients			CUIND23	Spacing ratio, Along 1.3 Across 1.6				
0	1.12	1.11	1.12	1.09	1.04	1.04	1.00	0.99	1.00
1	1.03	0.99	0.95	0.96	0.93	0.87	0.89	0.87	0.84
2	0.94	0.87	0.80	0.85	0.82	0.73	0.79	0.75	0.71
3	0.86	0.76	0.69	0.75	0.72	0.61	0.70	0.65	0.60
4	0.80	0.68	0.60	0.67	0.65	0.53	0.63	0.57	0.52
5	0.73	0.61	0.53	0.60	0.58	0.46	0.56	0.50	0.46
6	0.68	0.55	0.47	0.54	0.52	0.40	0.51	0.45	0.40
7	0.63	0.50	0.42	0.49	0.48	0.36	0.47	0.40	0.36
8	0.59	0.46	0.38	0.45	0.44	0.33	0.43	0.37	0.32
9	0.55	0.42	0.35	0.42	0.41	0.29	0.40	0.34	0.29
10	0.52	0.39	0.32	0.39	0.38	0.27	0.37	0.31	0.27