

## Series: HSLSAR Micro Linear Strip

**Compact High Lumen Strip** 

### **HSL SAR FR Series**

**Sleek Low Profile Lensed Strip** 

#### FIXTURE DESCRIPTION:

Architecturally forward design! This Low Profile Micro Designed Strip Fixture, is sleek and contemporary and will work well in any environment. Multiple lengths and flexibility to run in continuous rows allows this fixture to be a perfect fit for: Schools, Offices, Conference Rooms, Designer Studios, Retail, or Hospitals. This fixture would also work well for any open concept area.

Hang individually with hanging cables, pendant mount or even ceiling mount. For continuous run applications see Wire Harness chart for plug and play harness options.

#### HOUSING

Die-formed and welded 22-gauge cold rolled steel body with knockouts on ends allowing continuous row mounting. A 1/2" regressed flange at the bottom ensures uniformity and rigidity. Design housing with formed LED gear-tray allows for uniform light and great distribution, putting light right where you need it.

#### **DIFFUSERS**

Both 4' & 8' Fixtures include a specially formulated frosted acrylic profile lens that provides high light transmission excellent glare control.

**Sleek Low Profile Lensed Strip:** 4', 8' and continuous rows


SIZE W x L x H in inches

4ft. - 3" x 48" x 3" 8ft. - 3" x 96" x 3"

4' Example:

HSL SARFR48LT43W5000LDMV40KWH

HSL SARFR96LT86W10045LDMV40KWH

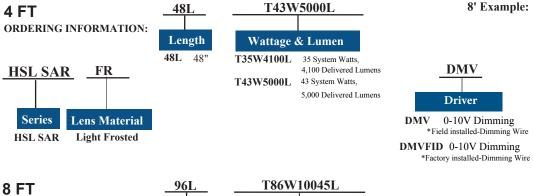

Wattage & Lumen

6,800 Delivered Lumens

8,900 Delivered Lumens


10,045 Delivered Lumens

T60W6850L 60System Watts,

T77W8900L 77 System Watts,

T86W10045L 86 System Watts,

Consult Factory for additional wattage and lumen options



EM Emergency Battery

PI1 3 Wires Harness:

Including White, Black and Green. PI2 4 Wires Harness:

Including White, Black, Green and Blue

for Emergency Battery Backup PI3D 5 Wires Harness:

Including White, Black, Green, Violet and Gray.

#### **Additional Ordering Information:**

See Page 2 for additional items needed





LITE Technology

ORDERING INFORMATION:

2055 Luna Rd. Suite 142 Carrollton, TX 75006

Phone: 972-247-3171 ext 2056


www.litetechnology.com email: info@litetechnology.com

Length

961. 96'



# Series HSL SAR FR

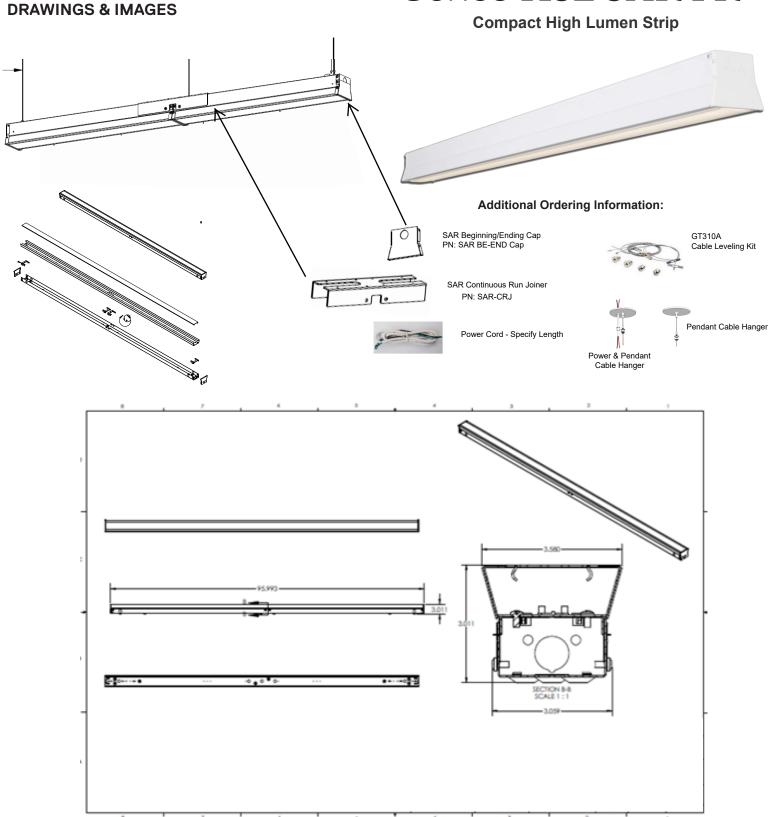



2055 Luna Rd. Suite 142 Carrollton, TX 75006

Phone: 972-247-3171 ext 2056

www.litetechnology.com email: info@litetechnology.com

