

HSL SCB Series

FEATURES & SPECIFICATIONS

INTENDED USE

This sleek, low profile, direct/indirect fixture provides a soft, smooth, low glare, ambient light perfect for today's commercial buildings. This unique, squared lens, combined with our high reflectance, post powder paint, matte finish, ensure a highly efficient, superior quality lighting fixture.

FEATURES

- Recessed or surface mounted
- Post painted in matte white finish with 92% reflectance
- Acrylic frosted diffuser with 90% light transmission
- Formed and welded in 24 gauge steel
- Direct/indirect lighting
- Easy removal of diffuser without any tools
- Volumetric low cost center lens
- LEDs life >60,000 hours
- >80 CRI
- 5 Years Warranty


SIZE W x L x H in inches

1x4 12.00"W x 48.00"L x 3.34"D

2x2 24.00"W x 24.00"L x 3.36"D

2x4 24.00"W x 48.00"L x 3.26"D

LED Architectural Direct/Indirect Luminaire

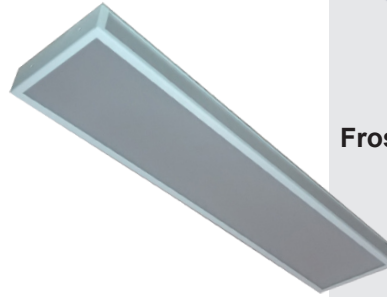

Frosted Side Lens



Perforated Side Lens

1X4 ORDERING INFORMATION

Example: HSL SCB14LF35W3900LDMV40K

HSLSCB	14L	F35W3900L	DMV	40K
Series	Size	Wattage / Lumen	Driver	Color Temperature
HSL SCB	14L			
Architectural Direct/Indirect Luminaire				
		F22W2700L	DMV	30K
		22 System Watts, 2675 Delivered Lumens	0-10V Dimming	3000K
			*Field installed-Dimming Wire	35K
		F35W3900L	DMVFID	40K
		35 System Watts, 3900 Delivered Lumens	0-10V Dimming	4000K
			*Factory installed-Dimming Wire	50K
		F40W4400L		
		40 System Watts, 4370 Delivered Lumens		
		F48W5100L		
		48 System Watts, 5120 Delivered Lumens		
		F57W6000L		
		57 System Watts, 5970 Delivered Lumens		
		Value Line		
		V37W4500L		
		37 System Watts, 4500 Delivered Lumens		
		V57W6900L		
		57 System Watts, 6900 Delivered Lumens		



* Consult FACTORY for more options

HSL SCB Series

LED Architectural Direct/Indirect
Luminaire

2x2 ORDERING INFORMATION

Example: HSL SCB22LF18W2100LDMV40K

HSLSCB	22L	F18W2100L	DMV	40K
Series	Size	Wattage / Lumen	Driver	Color Temperature
HSLSCB Architectural Direct/Indirect Luminaire	22L	F18W1800L 18 System Watts, 1780 Delivered Lumens F20W2200L 20 System Watts, 2155 Delivered Lumens F24W2600L 24 System Watts, 2565 Delivered Lumens F30W3000L 30 System Watts, 3065 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K
Value Line				
		V22W2700L 22 System Watts, 2700 Delivered Lumens V30W3700L 30 System Watts, 3700 Delivered Lumens		

2x4 ORDERING INFORMATION

Example: HSL SCB24LF35W3900LDMV40K

HSL SCB	24L	F35W3900L	DMV	40K
Series	Size	Wattage / Lumen	Driver	Color Temperature
HSL SCB Architectural Direct/Indirect Luminaire	24L	F30W3500L 30 System Watts, 3480 Delivered Lumens F35W3900L 35 System Watts, 3855 Delivered Lumens F40W4500L 40 System Watts, 4460 Delivered Lumens F48W5200L 48 System Watts, 5230 Delivered Lumens F57W6100L 57 System Watts, 6130 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K
Value Line				
		V46W5700L 46 System Watts, 5700 Delivered Lumens V57W6900L 57 System Watts, 6900 Delivered Lumens		



* Consult FACTORY for more options


HSL SCB Series

LED Architectural Direct/Indirect
Luminaire


DIMENSIONS

All dimensions are inches. Specifications subject to change without notice

1x4

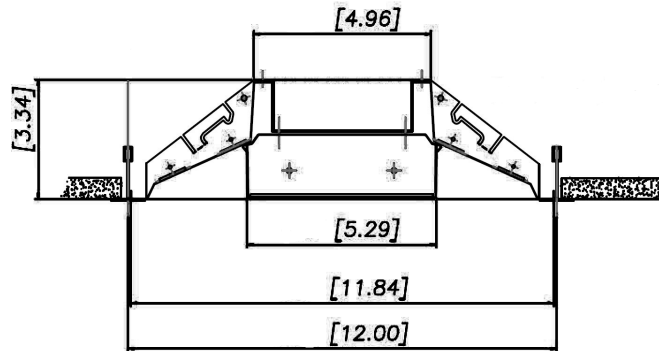


End View

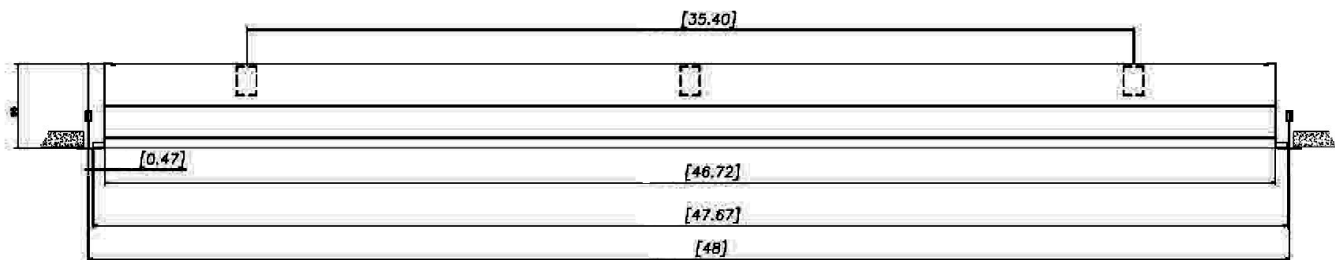


Side View

2x2

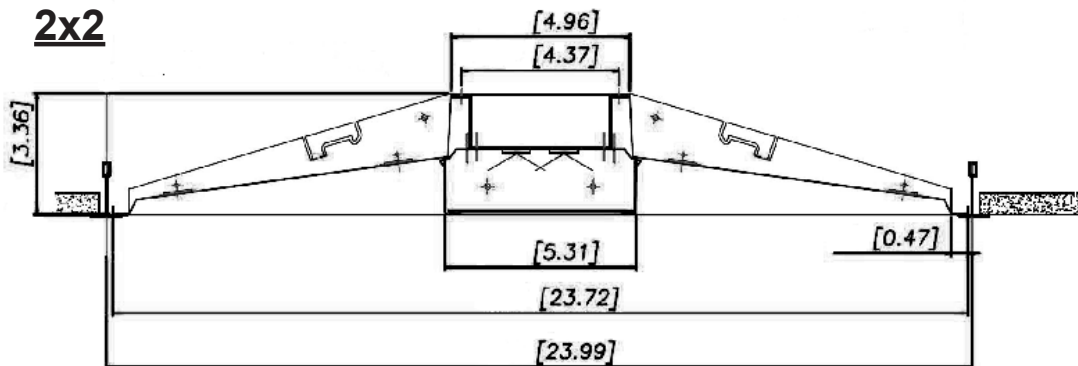

End View

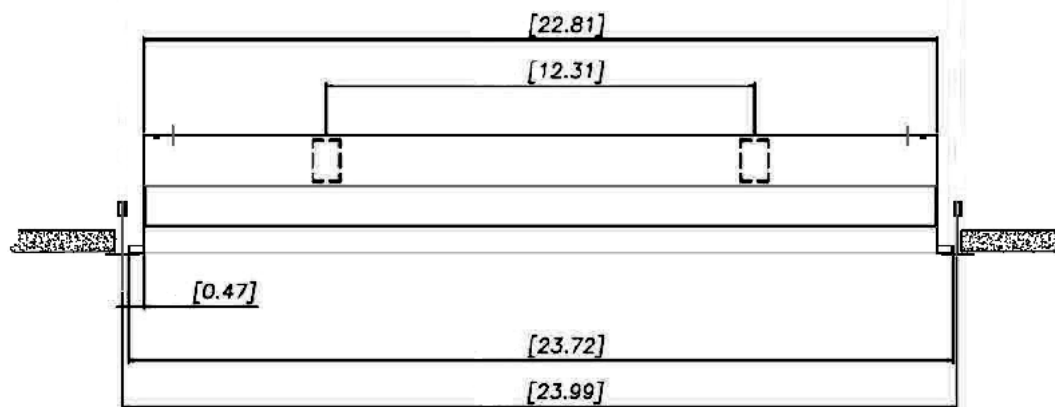

Side View




HSL SCB Series

LED Architectural Direct/Indirect
Luminaire


DIMENSIONS

All dimensions are inches. Specifications subject to change without notice

2x4

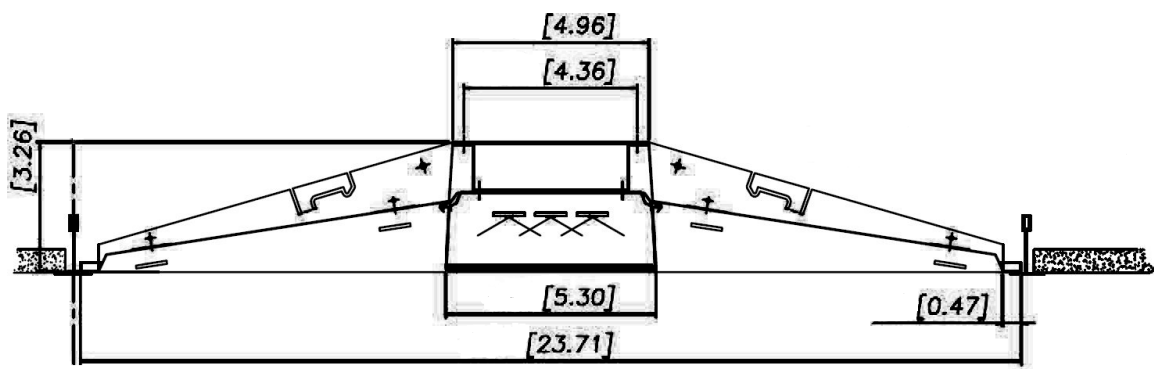

End View

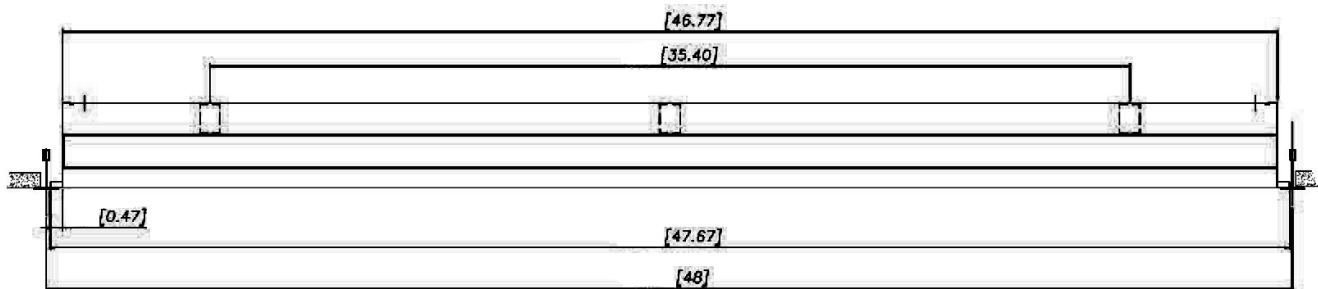

Side View