

Series HSL SES LED

HSL SES LED Full Body Micro

FEATURES & SPECIFICATIONS

Full body micro silhouette 2.5 inches (nominal) in diameter makes a bold statement with a minimal design in post-painted powder coat flat white finish (consult factory for other finishes). Snap Fit softy etched diffuser with small matched finish metal inserts to hide shadows and dark spots provides smooth, comfortable lighting and completes the clean appearance. Available for LED Arrays and Drivers, fluorescent and LED T8 lamps (with and without ballast). The fixture is beautifully scaled to both the T8 lamp or LED arrays. Fixtures can be surface mounted, on wall or ceiling, or pendant mounted. They can be used individually or joined together for continuous runs. End Cap is easily removable for clean, hassle free continuous row mounting. Add a wiring harness for complete plug and play operation in continuous runs.

MATERIALS & FEATURES

- Fully assembled housing is formed and welded, 22 gauge steel, chemically treated to resist corrosion and enhance paint adhesion
- Can be mounted individually or in continuous row
- Available with smooth frosted lens
- Knock-outs on back accept standard electrical fittings (by others) Consult factory for other locations
- Dimming ballast options available (consult factory for availability and system compatibility)



Wall bracket & Surface Mount LED w/Optional Sensor

SIZE H x W x L in inches
 - 2.83"H x 2.36"W x 23.60"L
 - 2.83"H x 2.36"W x 47.25"L
 /'2.83\$J 'z'2.36\$Y 'z'; 6043\$N

TYPICAL OPTIONS AND ACCESSORIES

Occupancy Sensor, Whips, fuses, and cord sets, wiring harness. See options or contact sales / factory for more details.

ORDERING INFORMATION

2FT

SS	HLSSES(1R)	FR	24L	R14W1400L	STMV	40K	WH	
Series	Series		Width	Wattage and Lumen	Driver	Color Temperature	Finish	Configuration
SS Occupancy Sensor Blank Metal Plate Cover	SES LED Linear Surface Mounted		24L 23.60"	R14W1400L 14 System Watts, 1400 Delivered Lumens R20W2000L 20 System Watts, 2000 Delivered Lumens	STMV Step Dimming *Dimming Range 50% /100% Output current	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White (standard) Option: BK Black BN Brushed Nickel	Blank Individual -B Beginner Run -E Ender Run -J Joiner
	1 R	Lens						
	GRID Mount	FR Frosted Lens						
		NOTE: if R1 is coded - then Caddy clips for Grid Mount will be supplied						

Example: SSSESFR24LR14W1400LSTMV40KWH


4FT

SS	HLSSES(1R)	FR	48L	F31W3100L	STMV	40K	WH	
Series	Series		Width	Wattage and Lumen	Driver	Color Temperature	Finish	Configuration
SS Occupancy Sensor Blank Metal Plate Cover	SES LED Linear Surface Mounted		48L 47.20"	F31W3100L 31 System Watts, 3100 Delivered Lumens R40W4000L 40 System Watts, 4000 Delivered Lumens	STMV Step Dimming *Dimming Range 50% /100% Output current	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White (standard) Option: BK Black BN Brushed Nickel	Blank Individual -B Beginner Run -E Ender Run -J Joiner
	1 R	Lens						
	GRID Mount	FR Frosted Lens						
		NOTE: if R1 is coded - then Caddy clips for Grid Mount will be supplied						
		*For color consistency between fixture lengths "F31W" should pair with "F62W"						
		*For color consistency between fixture lengths "R40W" should pair with "R80W"						

Example: SSSESFR48LF31W3100LSTMV40KWH

Series HSL UGS

Wall bracket & Surface Mount
LED w/Optional Sensor

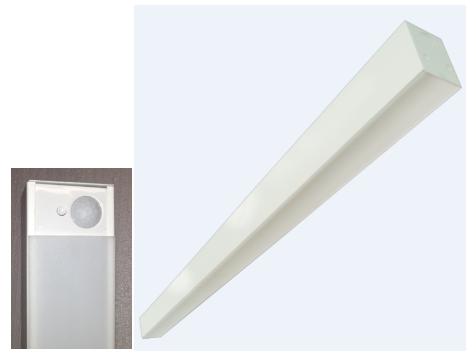

8FT

Example: SSSESFR96LF62W6200LSTMV40KWH

Series	Series	Width	Wattage and Lumen	Color Temperature	Finish	Configuration
SS Occupancy Sensor Blank Metal Plate Cover	HLSSES(1R) SES LED Linear Surface Mounted	96L 94.40"	F62W6200L 62 System Watts, 6200 Delivered Lumens *For color consistency between fixture lengths "F61W" should pair with "F31W" R80W8000L 80 System Watts, 8000 Delivered Lumens *For color consistency between fixture lengths "R80W" should pair with "R40W"	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White (standard) Option: BK Black BN Brushed Nickel	Blank Individual -B Beginner Run -E Ender Run -J Joiner
	FR Frosted Lens 1R GRID Mount NOTE: if R1 is coded - then Caddy clips for Grid Mount will be supplied			STMV Step Dimming *Dimming Range 50% /100% Output current		

Accessories-Hanging Kit Options

Part Number	Descriptions
HC501WH	Cable kit with 4' Cable & 3 Wires Power Feed/Cable Incl. and White Canopy
HC502WH	Cable kit with 12' Cable & 3 Wires Power feed/Cable Incl. and White Canopy
HC5015WWH	Cable kit with 4' Cable & 5 Wires Power Feed/Cable Incl. and White Canopy
HC5025WWH	Cable kit with 12' Cable & 5 Wires Power feed/Cable Incl. and White Canopy
2SCS24WH	Two Stem kits with 24" Stem, Canopy and Mounting hardware for a 4' fixture





Plug in system Options - it's for continuous run application by simply plugging in sections together

Part Number	Descriptions
PI1	3 Wires Harness, Including White, Black and Green
PI2	4 Wires Harness, Including White, Black, Green and Blue for Emergency Battery Backup
PI3D	5 Wires Harness, Including White, Black, Green, Violet and Gray

* Add the accessories part numbers at the end to be factory installed

Dimensions

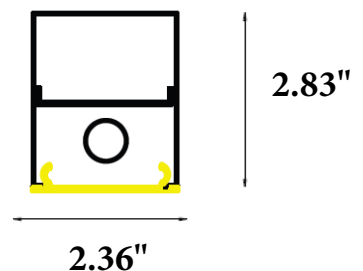

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.