

FEATURES & SPECIFICATIONS

INTENDED USE

Clean Sleek and Contemporary design, micro silhouette makes a bold statement with a minimal design in brushed nickel powder coated finish (consult factory for other finishes). Scaled to the LED module the matte white diffuser surrounds the LEDs for soft lighting. This fixture can be surface mounted on wall, ceiling or pendant mounted with specially engineering cable mounting kit.

SIZE L x W x D in inches


- 22.5" or 46" or 92"L x 2"W x 2.6"D - 22.5"
or 46" or 92"L x 3"W x 3"D

MATERIALS & FEATURES

- Fully assembled housing is formed and welded, 22 gauge steel, chemically treated to resist corrosion and enhance paint adhesion
- Available in brushed nickel. Consult for other finishes
- Available with smooth frosted lens
- Clean body - No knock-outs on sides or ends
- Knock-outs on back accept standard electrical fittings (by others) Consult factory for other locations
- Dimming ballast options available (consult factory for availability and system compatibility)

HSL SKD Series

2" Wide Low Profile LED Surface Mount

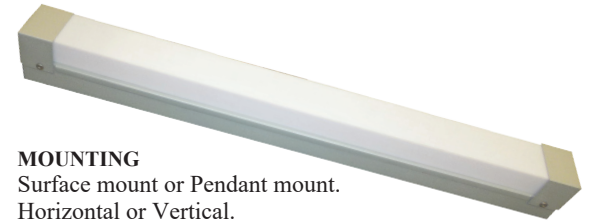

MOUNTING

Surface mount or Pendant mount.
Horizontal or Vertical.

TYPICAL OPTIONS AND ACCESSORIES

Whips, hanging kits, and cord sets. See options page at the end of the T02Strip section, or contact factory for more details.

ACCESSORIES

SKD-HC301WH - 5' cable kit w/white canopy* SKD-HC301BN - 5' cable kit w/brushed nickel* SKD-HC501BN - 4' Cable Mounting Kit*

*Includes canopy for cable only and a canopy for cable & power chord.

ORDERING INFORMATION

2FT - STANDARD

HSL SKD	FR	24L	E12W1200L	DMV	40K	WH	
Series		Width	Wattage and Lumen		Color Temperature	Finish	
HSL SKD Low Profile LED Surface Mount 2" Width Body		24L 22.5"	E12W1200L 12 System Watts, 1200 Delivered Lumens		30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BN Brushed Nickel BK Black BZ Bronze	
	Lens			Driver			Options
	FR Frosted Smooth			DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire			WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug

Example: HSL SKDFR24LE12W1200LDMV40KWH

2FT - HIGH OUTPUT

HSL SKD	FR	24L	H18W1750L	DMV	40K	WH	
Series		Width	Wattage and Lumen		Color Temperature	Finish	
SKD Low Profile LED Surface Mount 2" Width Body		24L 24"	H18W1750L 18 System Watts, 1750 Delivered Lumens		30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BN Brushed Nickel BK Black BZ Bronze	
	Lens			Driver			Options
	FR Frosted Smooth			DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire			WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug

SKD-HC301WH - 5' cable kit w/white canopy*
SKD-HC301BN - 5' cable kit w/brushed nickel*
SKD-HC501BN - 4' Cable Mounting Kit*

*Includes canopy for cable only and a canopy for cable & power chord.

* Consult FACTORY for more options



HSL SKD Series

2" Wide Low Profile LED Surface Mount



* Consult FACTORY for more options

4FT - STANDARD

Example: SKDFR48LE24W2400LDMV40K

HSL SKD	FR	48L	E24W2400L	DMV	40K	WH	
Series		Width	Wattage and Lumen	Driver	Color Temperature	Finish	Options
HSL SKD Low Profile LED Surface Mount 2" Width Body	FR Frosted Smooth	48L 46"	E24W2400L 24 System Watts, 2400 Delivered Lumens E28W2700L 28 System Watts, 2700 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BN Brushed Nickel BK Black BZ Bronze	WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug

4FT - HIGH OUTPUT

HSL SKD	FR	48L	H35W3400L	DMV	40K	WH	
Series		Width	Wattage and Lumen	Driver	Color Temperature	Finish	Options
SKD Low Profile LED Surface Mount 2" Width Body	FR Frosted Smooth	48L 46"	H35W3400L 35 System Watts, 3400 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BN Brushed Nickel BK Black BZ Bronze	WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug

8 FT - STANDARD

HSL SKD	FR	96L	E32W3450L	DMV	40K	WH	
Series		Width	Wattage and Lumen	Driver	Color Temperature	Finish	Options
SKD Low Profile LED Surface Mount 2" Width Body	FR Frosted Smooth	96L 92"	E32W3450L 32 System Watts, 3450 Delivered Lumens E48W4800L 48 System Watts, 4800 Delivered Lumens E57W5400L 57 System Watts, 5400 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BN Brushed Nickel BK Black BZ Bronze	WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug

8 FT - HIGH OUTPUT

HSL SKD	FR	96L	H72W7000L	DMV	40K	WH	
Series		Width	Wattage and Lumen	Driver	Color Temperature	Finish	Options
HSL SKD Low Profile LED Surface Mount 2" Width Body	FR Frosted Smooth	96L 92"	H72W7000L 72 System Watts, 7000 Delivered Lumens	DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BN Brushed Nickel BK Black BZ Bronze	WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug

* Consult FACTORY for more options

HSL SKD Series

3"W Low Profile LED Surface Mount



DIMENSIONS

All dimensions are inches. Specifications subject to change without notice

SIZE L x W x D in inches

- 22.5" or 46" or 92"L x 3"W x 3"D

ORDERING INFORMATION

Example: HSL SKDWBMW24LE24W2400LDMV40KBN

2FT - STANDARD

HSL SKDWB	MW	24L	E24W2400L	DMV	40K	BN
Series SKDWB Low Profile LED Surface Mount 3" Width Body	Lens MW White Lens FR Frosted Lens	Size 24L 22.5"	Wattage and Lumen E24W2400L 24 System Watts, 2400 Delivered Lumens E28W2700L 28 System Watts, 2700 Delivered Lumens	Driver DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	Color Temperature 30K 3000K 35K 3500K 40K 4000K 50K 5000K	Finish WH White BN Brushed Nickel BK Black BZ Bronze
						Options WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug

2FT - HIGH OUTPUT

Example: SKDWBMW24LR35W3400LDMV40KBN

HSL SKDWB	MW	24L	R35W3400L	DMV	40K	BN
Series SKDWB Low Profile LED Surface Mount 3" Width Body	Lens MW White Lens FR Frosted Lens	Size 24L 22.5"	Wattage and Lumen R35W3400L 35 System Watts, 3400 Delivered Lumens	Driver DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	Color Temperature 30K 3000K 35K 3500K 40K 4000K 50K 5000K	Finish WH White BN Brushed Nickel BK Black BZ Bronze
						Options WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug

DKS-HC301WH - 5' cable kit w/white canopy*
DKS-HC301BN - 5' cable kit w/brushed nickel*
DKS-HC501BN - 4' Cable Mounting Kit*

*Includes canopy for cable only and a canopy for cable & power chord.

*Consult factory for custom finish, varies lumen output availability and system compatibility.



HSL SKD Series

3" Wide Low Profile LED Surface Mount

4FT - STANDARD

Example: SKDWB MW 48L E48W4800L DMV 40K BN

SKDWB	MW	48L	E48W4800L	DMV	40K	BN
Series		Size	Wattage and Lumen		Color Temperature	Finish
SKDWB Low Profile LED Surface Mount 3" Width Body		48L 46"	E32W3450L 32 System Watts, 3450 Delivered Lumens E48W4800L 48 System Watts, 4800 Delivered Lumens E57W5400L 57 System Watts, 5400 Delivered Lumens		30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BN Brushed Nickel BK Black BZ Bronze
	Lens			Driver		Options
	MW White Lens FR Frosted Lens			DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug	

4FT - HIGH OUTPUT

SKDWB	MW	48L	R72W7000L	DMV	40K	BN
Series		Size	Wattage and Lumen		Color Temperature	Finish
SKDWB Low Profile LED Surface Mount 3" Width Body		48L 46"	R72W7000L 72 System Watts, 7000 Delivered Lumens		30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BN Brushed Nickel BK Black BZ Bronze
	Lens			Driver		Options
	MW White Lens FR Frosted Lens			DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug	

8FT - STANDARD

SKDWB	MW	96L	E114W11800L	DMV	40K	BN
Series		Size	Wattage and Lumen		Color Temperature	Finish
SKDWB Low Profile LED Surface Mount 3" Width Body		96L 92"	E114W11800L 114 System Watts, 11800 Delivered Lumens		30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BN Brushed Nickel BK Black BZ Bronze
	Lens			Driver		Options
	MW White Lens FR Frosted Lens			DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug	

8FT - HIGH OUTPUT

SKDWB	MW	96L	R144W14000L	DMV	40K	BN
Series		Size	Wattage and Lumen		Color Temperature	Finish
SKDWB Low Profile LED Surface Mount 3" Width Body		96L 92"	R144W14000L 144 System Watts, 14000 Delivered Lumens		30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BN Brushed Nickel BK Black BZ Bronze
	Lens			Driver		Options
	MW White Lens FR Frosted Lens			DMV 0-10V Dimming *Field installed-Dimming Wire DMVFID 0-10V Dimming *Factory installed-Dimming Wire	WP 6 ft. 3 wire 18 gauge whip CS 8ft. 3/18 3 prong (5-15P) cord & plug	



*Consult factory for custom finish, varies lumen output availability and system compatibility.

LITE Technology

Phone: 972-247-3171 ext 2056

www.litetechnology.com email: info@litetechnology.com

HSL SKD Series

Low Profile LED Surface Mount

DIMENSIONS

All dimensions are inches.

Specifications subject to change without notice.

