

CATALOG#:

PROJECT:

TYPE:

LED Wall Mount Fixture

# Series HSL STW

## Versatile LED Wall Mount Fixture

Introducing LITE'S New Specification Grade, wall mount fixture with forward throw optics and an added uplight benefit. The **HSL-STW** is a sleek newly designed extremely versatile fixture solution. This fixture is ideal for brightening perimeters or offices, or adding general illumination to smaller spaces where an additional uplight throw adds an interesting aesthetic. This fixture would also be perfect for Corridors, Stairwells, and as an Over the Bed Light. Check with factory for continuous run options.

### CONSTRUCTION:


Housing is die-formed and embossed code gauge steel with aluminum end caps. Standard finish is powder coat white. Custom colors available.

### MOUNTING:

Wall mount

### TYPICAL OPTIONS & ACCESSORIES:

Smart Sense (Ultrasonic technology for open area detection and line of sight obstructions), pull chain, emergency battery backup (for 2ft. housing, remote EM only) and custom colors.

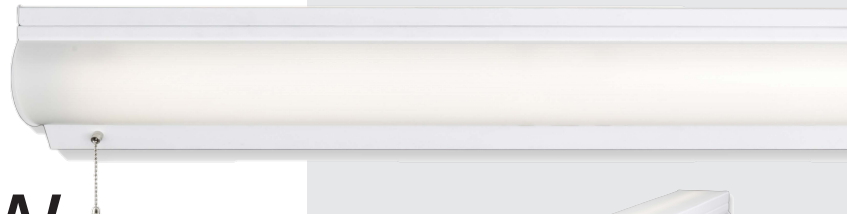


### DIMENSIONS

2ft - 5.613"W x 24"L x 4.5781"Dp

4ft - 5.613"W x 48.878"L x 4.5781"Dp

### FEATURES & BENEFITS

- Continuous row mounting
- Post painted powder coat finish
  - White standard, custom colors available
- Suitable for dry and damp locations
- 50,000 hrs of L70 LED life
- CRI >80
- 0-10 Volt dimmable 120-277V
- Power factor 0.99
- 5 year warranty

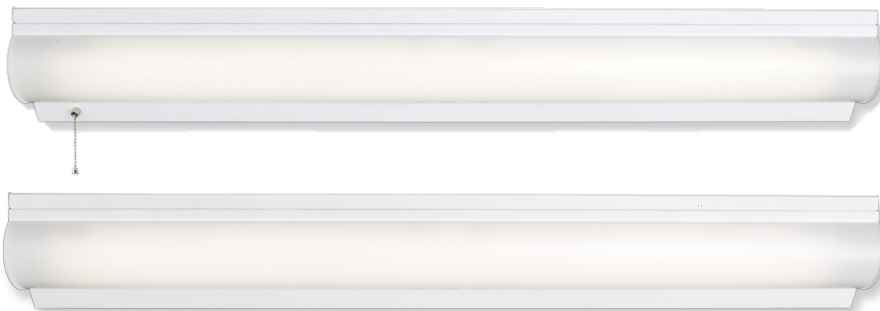

Available with Separate Direct and Indirect Lighting  
controlled by wall switch or pull chain.

CATALOG# : \_\_\_\_\_

PROJECT : \_\_\_\_\_


TYPE : \_\_\_\_\_

## Series HSL STW


LED Stairwell

### DRAWINGS & IMAGES


#### 2 FT

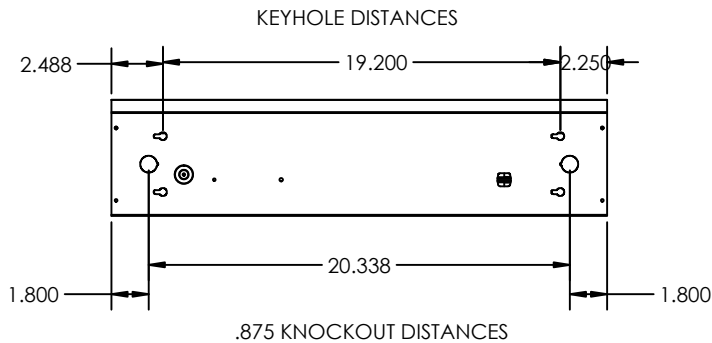

#### End View

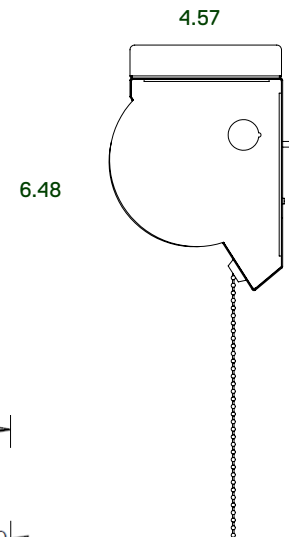

#### 4 FT

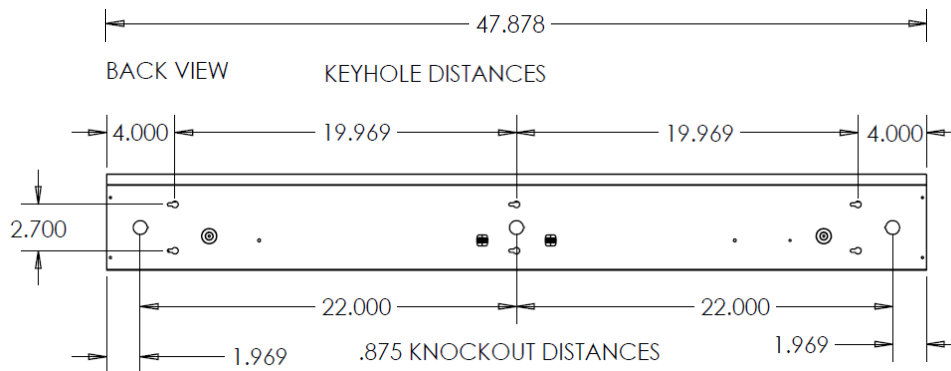

CATALOG# :

PROJECT :

TYPE :

## Series HSL STW

### LED Stairwell

#### ORDER INFORMATION

Example: HSL STWFR48LUY24WD48WDMV40KPC4

SERIES	LENS	SIZE	WATTAGE & LUMENS	DRIVER	COLOR	ACCESSORIES
HSLSTW	FR Frosted lens	24L 24"	<p><b>Up and Down</b></p> <p><b>UY6WD12W</b> Uplight 6 Watts Downlight 12 Watts 1800 Lumens</p> <p><b>UY12WD24W</b> Uplight 12 Watts Downlight 24 Watts 3600 Lumens</p> <p><b>Up or Down Light Only</b></p> <p><b>Y13W1300L</b> 13 Watts 1300 Lumens</p> <p><b>Y19W1900L</b> 19 Watts 1900 Lumens</p> <p><b>Y23W2300L</b> 23 Watts 2300 Lumens</p> <p>----- *</p>	<p><b>DMV</b> 0-10V Dimming Input Voltage 120V - 277V</p> <p><b>DMV(XX)*</b> Input Voltage 120V - 277V</p> <p>*(XX) for Percentage of Light Output when it is not Occupied.</p>	<p><b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K</p>	<p><b>PC4</b> 4 Way Pull Chain</p>
		48L 48"	<p><b>Up and Down</b></p> <p><b>UY12WD24W</b> Uplight 12 Watts Downlight 24 Watts 3600 Lumens</p> <p><b>UY24WD48W</b> Uplight 24 Watts Downlight 48 Watts 7200 Lumens</p> <p><b>Up or Down Light Only</b></p> <p><b>Y26W2600L</b> 26 Watts 2600 Lumens</p> <p><b>Y38W3800L</b> 38 Watts 3800 Lumens</p> <p><b>Y45W4500L</b> 45 Watts 4500 Lumens</p> <p>----- *</p>			

**Note:**

\*Programmable LED drivers allow custom configured wattages and corresponding lumens.

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance .