

Series HSLVPC & HSLVPW

FEATURES

Great Vapor-Proof Fixture - ideal for so many applications including: parking lots, security, warehouse, residential areas, walkways, storage, coolers, underpasses, gas station, exterior stairwells, loading docks and more.

SPECIFICATIONS

- * Die cast housing
- * UL listed / CUL listed
- * Input voltage: 120V AC
- * Highest quality long life LEDs
- * Low Tj for long life, low lumen depreciation
- * LED power — 17Watts
- * Lumens — approx. 900
- * Low starting temp -30 C
- * Color temperature — 5000K



HSLVPW


model VPC/VPW

LED Vapor-proof Lighting





HSLVPC

Powered by **CREE™** LEDs

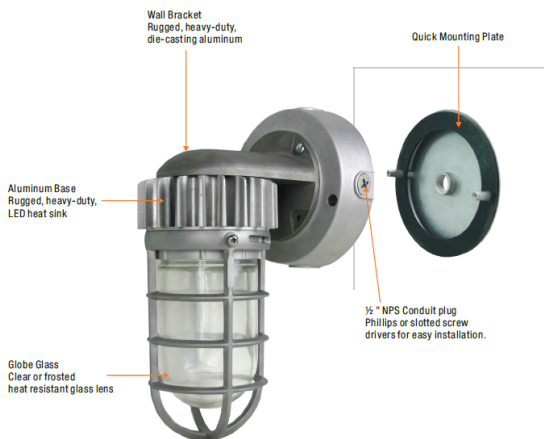

1/2" Pendant Mount
Rugged, heavy-duty,
die-casting aluminum

DIMENSIONS

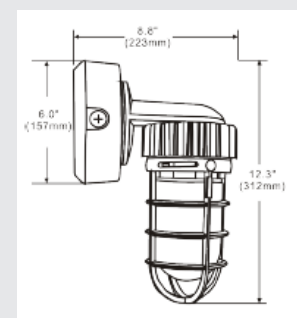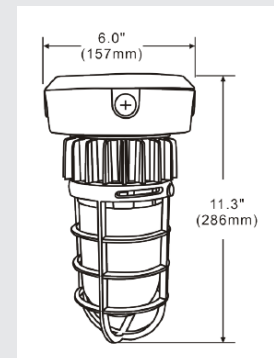

ORDERING INFORMATION

Series	Wattage	Lumen	Driver	Color Temperature	Finish
HSLVPC	17W - 17 Wattage	900L - 900 Lumen	MV - 120-277V	50K - 5000K	SN - Satin Nickel
HSLVPW	17W - 17 Wattage	900L - 900 Lumen	MV - 120-277V	50K - 5000K	SN - Satin Nickel

LITE Technology
2055 Luna Rd. Suite 142 Carrollton, TX 75006
Phone: 972-247-3171 ext 2056
www.litetechnology.com email: info@litetechnology.com

