

Series HSL W4A

LED Linear Wall Washer

HSL W4A Series LED Linear Wall Washer



FEATURES & SPECIFICATIONS

INTENDED USE

A linear Wall Washer fixture for distinctive architectural lighting plans. Ideal for lobbies, bathroom and office areas. W4A Series fixtures can be installed individually or in group patterns.

SIZE W x L x H in inches

2ft. - 4" x 24" x 4"

4ft. - 4" x 48" x 4"

8ft. - 4" x 96" x 4"

HOUSING

Die-formed and welded 22-gauge cold rolled steel knockouts on ends allow continuous wireway mounting. A 1/2" regressed flange at the bottom insures uniformity and rigidity. Design housing allows for uniform light and great diffusion down a wall surface.

DIFFUSERS (not included)

Fixture accepts various lenses or louvers. 4' and 8' units have a steel mullion to join two individual diffusers.

MOUNTING

Fixtures can be Semi-Recessed, Surface Mounted to the ceiling. Fixture may also be pendant mounted with rigid stem.

OPTIONS AND ACCESSORIES

Cord sets, whips, occupancy sensors, wire guards. Contact factory for additional options.



ORDERING INFORMATION: 2FT

HSL W4A	SF	24L	R12W1200L	DMV	40K	WH	
Series		Length	Wattage & Lumen		Color Temperature	Finish	Options
HSL W4A		24L 24"	R12W1200L		30K 3000K	WH White	
Surfaced Mounted Linear			12 System Watts, 1200 Delivered Lumens		35K 3500K	BK Black	
Wall Washer			R24W2400L		40K 4000K	SI Silver	
HSL W4AR			24 System Watts, 2400 Delivered Lumens		50K 5000K		
Recessed Mounted Linear				Driver			
Wall Washer				DMV 0-10V Dimming *Field installed-Dimming Wire			
	Lens Material			DMVFID 0-10V Dimming *Factory installed-Dimming Wire			
	SF Snap In Frosted Acrylic Lens (85% transmission) *Special for LEDs						

Example: HSL W4ASF24LR12W1200LDMV40KWH

- P11** 3 Wires Harness:
Including White, Black and Green.
- P12** 4 Wires Harness:
Including White, Black, Green and Blue
for Emergency Battery Backup.
- P13D** 5 Wires Harness:
Including White, Black, Green, Violet
and Gray.





Series HSL W4A

LED Linear Wall Wash

ORDERING INFORMATION: 4FT

Example: HSL W4ASF48LR24W2400LDMV40KWH

HSL W4A	SF	48L	R24W2400L	DMV	40K	WH	
Series		Length	Wattage & Lumen		Color Temperature	Finish	Options
HSL W4A Surfaced Mounted Linear Wall Washer		48L 48"	R24W2400L 24 System Watts, 2400 Delivered Lumens		30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BK Black SI Silver	
HSL W4AR Recessed Mounted Linear Wall Washer			R48W4800L 48 System Watts, 4800 Delivered Lumens	Driver			
	Lens Material			DMV 0-10V Dimming *Field installed-Dimming Wire			
	SF Snap In Frosted Acrylic Lens (85% transmission) *Special for LEDs			DMVFID 0-10V Dimming *Factory installed-Dimming Wire			
							P11 3 Wires Harness: Including White, Black and Green. P12 4 Wires Harness: Including White, Black, Green and Blue for Emergency Battery Backup. P13D 5 Wires Harness: Including White, Black, Green, Violet and Gray.

ORDERING INFORMATION: 8FT

Example: HSL W4ASF96LR48W4800LDMV40KWH

HSL W4A	SF	96L	R48W4800L	DMV	40K	WH	
Series		Length	Wattage & Lumen		Color Temperature	Finish	Options
HSL W4A Surfaced Mounted Linear Wall Washer		96L 96"	R48W4800L 48 System Watts, 4800 Delivered Lumens		30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BK Black SI Silver	
HSL W4AR Recessed Mounted Linear Wall Washer			R96W9600L 96 System Watts, 9600 Delivered Lumens	Driver			
	Lens Material			DMV 0-10V Dimming *Field installed-Dimming Wire			
	SF Snap In Frosted Acrylic Lens (85% transmission) *Special for LEDs			DMVFID 0-10V Dimming *Factory installed-Dimming Wire			
							P11 3 Wires Harness: Including White, Black and Green. P12 4 Wires Harness: Including White, Black, Green and Blue for Emergency Battery Backup. P13D 5 Wires Harness: Including White, Black, Green, Violet and Gray.




Series HSL W4A

LED Linear Wall Wash


DIMENSIONS

All dimensions are inches. Specifications subject to change without notice

Recessed Mounted Drawing

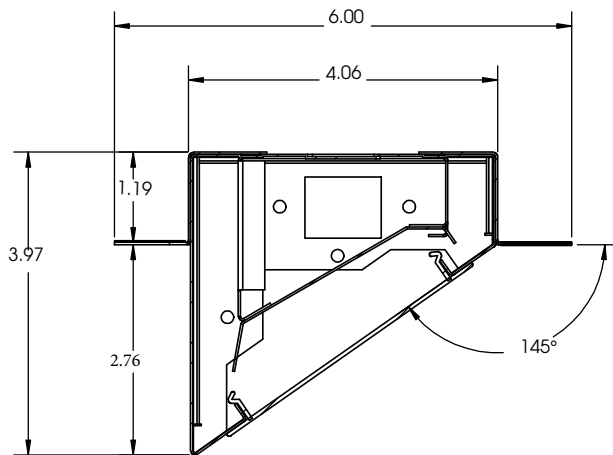

Surfaced Mounted Drawing

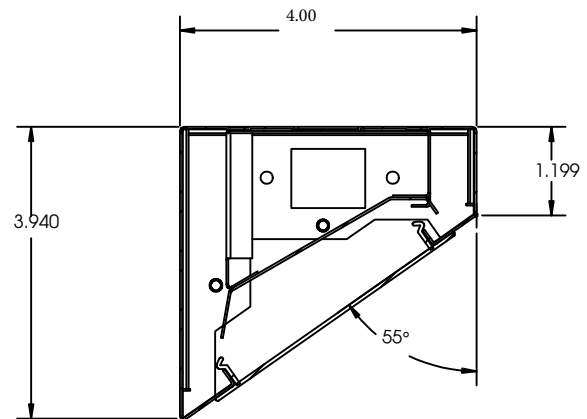


NOTE:

This fixture can be produced with a smooth back for Pendant Mounting. Hanging options would need to include Stem or Rigid Pipe. Check with your Sales Consultant for options.

4FT Recessed Mounted Drawing

KNOCKOUT DISTANCES

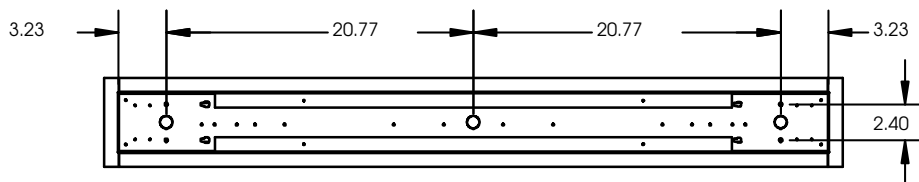

4FT Surfaced Mounted Drawing

