

FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade, low profile surface mount provides for an almost limitless range of applications in areas where surface modulars (no grid) are required. The shrouded troffer is an economical alternative to the 153 series. It is Ideal for all commercial and industrial buildings requiring

SIZE W x L x H in inches (mm)

1x4 - 11.75W x 48.0L x 4.5Dp

2x2 - 23.75W x 24.0L x 3.75Dp

2x4 - 23.75W x 48.0L x 3.75Dp



153 Series

Surface Mounted Troffer



MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided on back of housing. Ballast cover or reflector snaps into place; no tools required for ballast access. Lens is held with a hinged steel door frame; frame hinges downward on either side and is held closed by two positive cam latches. Premium, full specular reflectors are available as an option to increase efficiency or modify lighting distribution.

- POST PAINTED POWDER COAT FINISH
- Shallow, low profile design. No external fasteners.
- Clear 0.10thk A12 acrylic lens is standard; many options available

MOUNTING

Direct surface mount.

TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, Cord sets, whips, occupancy sensors Hanging kits, Wire guards. Contact factory for additional options.

LISTING

Fixture & Driver: UL Listed Driver: Thermally protected, class P, HPF, Non PCB

ORDERING INFORMATION

Example: 153A24F32W3450LDMV40K

STANDARD

153A24	F32W3450L	DMV	40K
Series	Wattage and Lumen	Driver	Kelvin Temperture
153A24 - 2x4	F32W3450L 32 System Watts, 3450 Delivered Lumens F48W4800L 48 System Watts, 4800 Delivered Lumens F57W5400L 57 System Watts, 5400 Delivered Lumens	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K

HIGH OUTPUT

153A24	H72W7000L	DMV	40K
Series	Wattage and Lumen	Driver	Kelvin Temperture
153A24 - 2x4	H72W7000L 72 System Watts, 7000 Delivered Lumens	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K


*Consult Factory for more options

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

153 Series

Surface Mounted Troffer

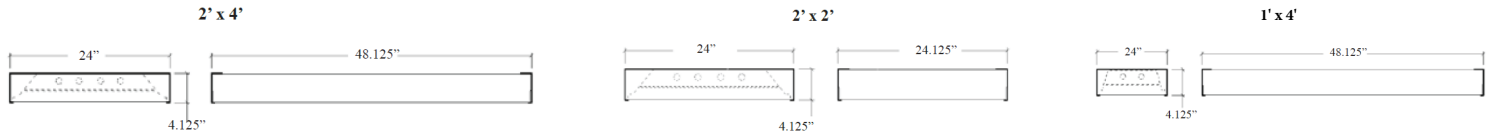

ORDERING INFORMATION

Example: 153A22F24W2400LDMV40K

2x2 STANDARD

153A22	F24W2400L	DMV	40K
Series	Wattage and Lumen	Driver	Kelvin Temperature
153A22 - 2x2	F24W2400L 24 System Watts, 2400 Delivered Lumens F28W2700L 28 System Watts, 2700 Delivered Lumens F35W3200L 35 System Watts, 3200 Delivered Lumens	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K

2x2 HIGH OUTPUT

153A22	H48W4350L	DMV	40K
Series	Wattage and Lumen	Driver	Kelvin Temperature
153A22 - 2x2	H48W4350L 48 System Watts, 4350 Delivered Lumens	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K

1x4 STANDARD

Example: 153A14F32W3450LDMV40K

153A14	F32W3450L	DMV	40K
Series	Wattage and Lumen	Driver	Kelvin Temperature
153A14 - 1x4	F32W3450L 32 System Watts, 3450 Delivered Lumens F48W4800L 48 System Watts, 4800 Delivered Lumens F57W5400L 57 System Watts, 5400 Delivered Lumens	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K

1x4 HIGH OUTPUT

153A14	H72W7000L	DMV	40K
Series	Wattage and Lumen	Driver	Kelvin Temperature
153A14 - 1x4	H72W7000L 72 System Watts, 7000 Delivered Lumens	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K

* Consult for more options

Catalog Number:

Notes: